
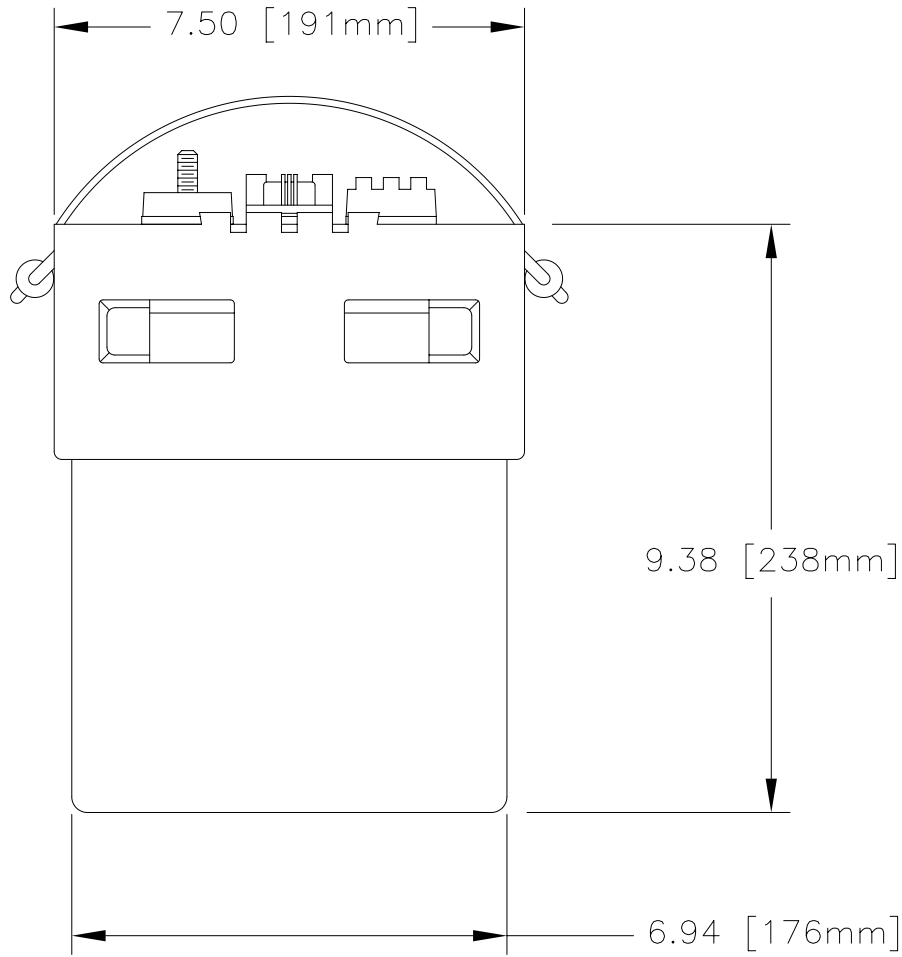
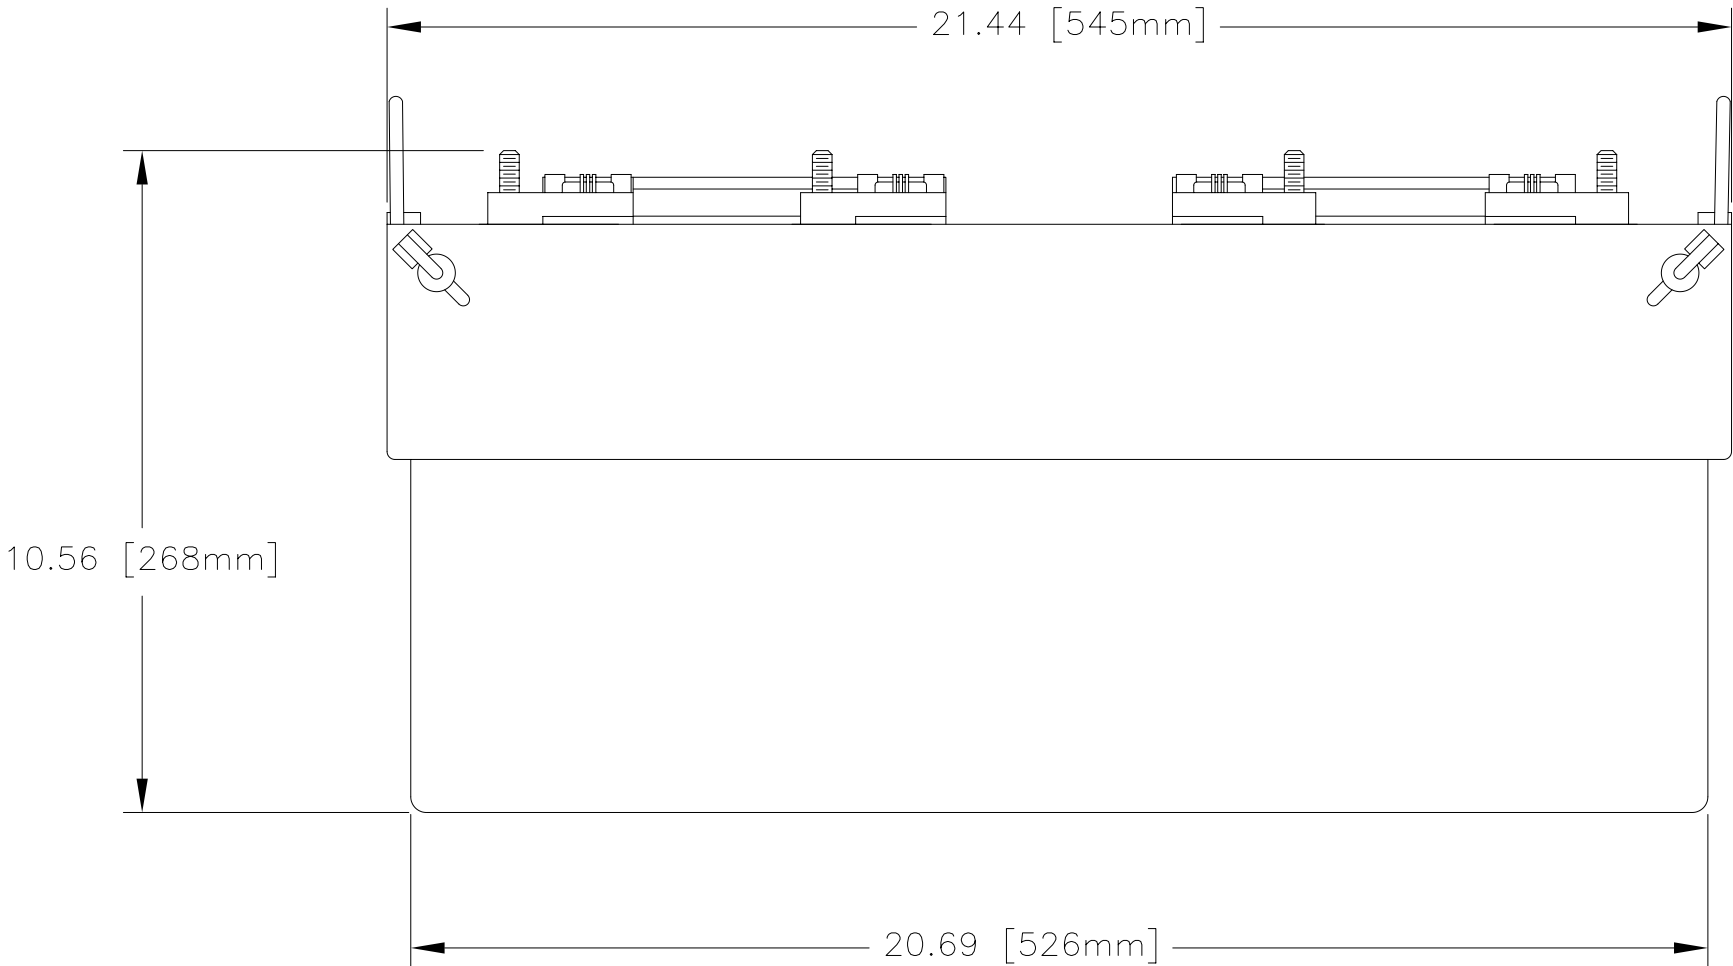


NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
2. ALL DIMENSIONS ARE IN INCHES [MM].

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

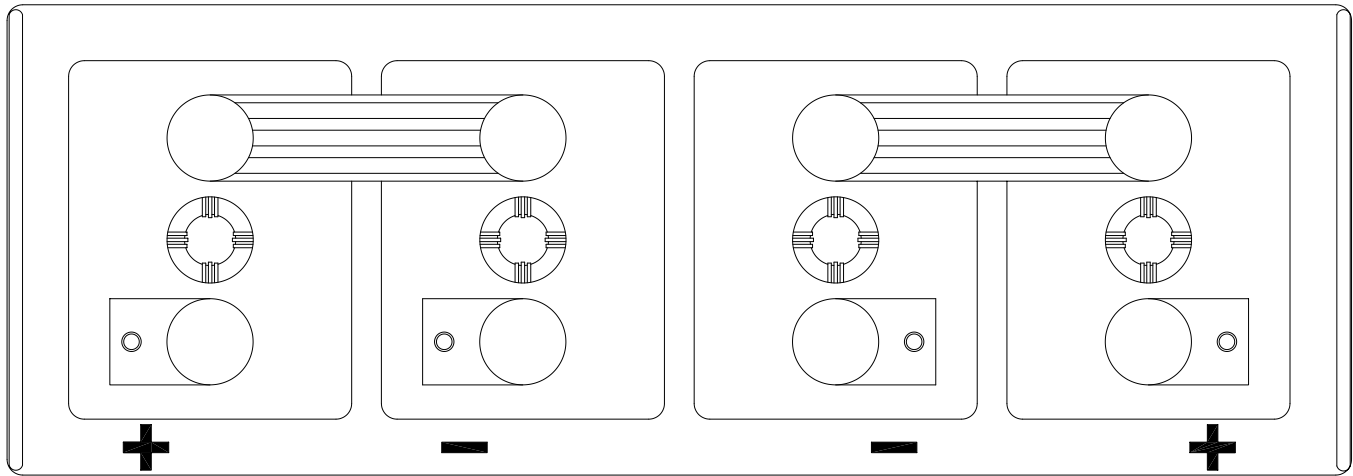

CAPACITY RATINGS	
PART NUMBER	CB2X4200
NOMINAL WEIGHT (LBS)	119 WET/97 DRY
COLD CRANKING AMPS @ 0°F (−18° C)	1375
RESERVE CAPACITY 1.75 VOLTS/CELL @ 77°F (25° C)	528 MIN

ENVELOPE DRAWING

		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION			MATERIAL SPECIFICATION		ITEM NO.				
QTY REQD		PARTS LIST												
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .XX ± .12 .XXX ± .125				CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790								
				APPROVALS		DATE	TITLE BATTERY, 2X 4 VOLT, CB2X4200							
				DRAWN	RM	10/31/03								
				TREATMENT		NONE	CHECKED	AMIII	6/20/07	SIZE	CAGE CODE		DWG NO.	REV
FINISH		NONE	APPROVED	JBT	6/20/07	C	63017		CB2X4200					
SIMILAR TO		ACT WT	CALC WT	ISSUED	NS	6/22/07	SCALE		NONE		SHEET	1	OF	1

The data/information contained herein has been reviewed and approved for general release on the basis that this document contains no export-controlled information.

ENGINEERING COPY 22JUN07