
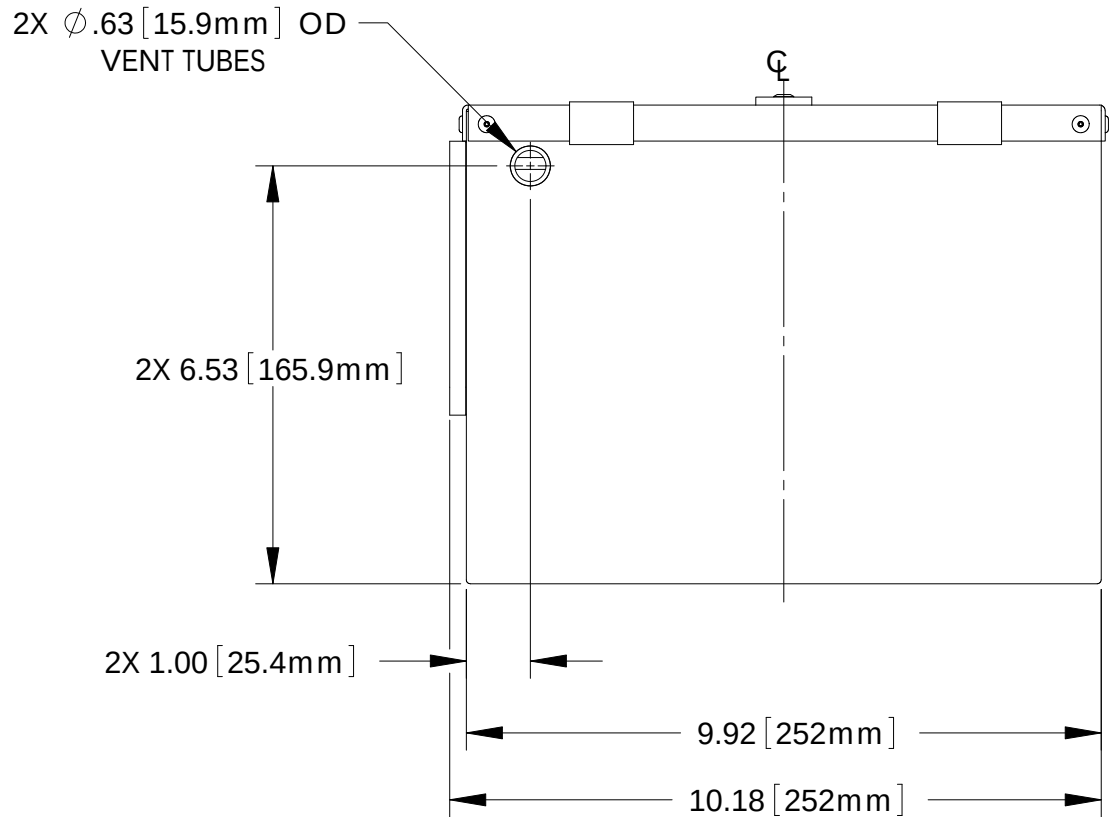
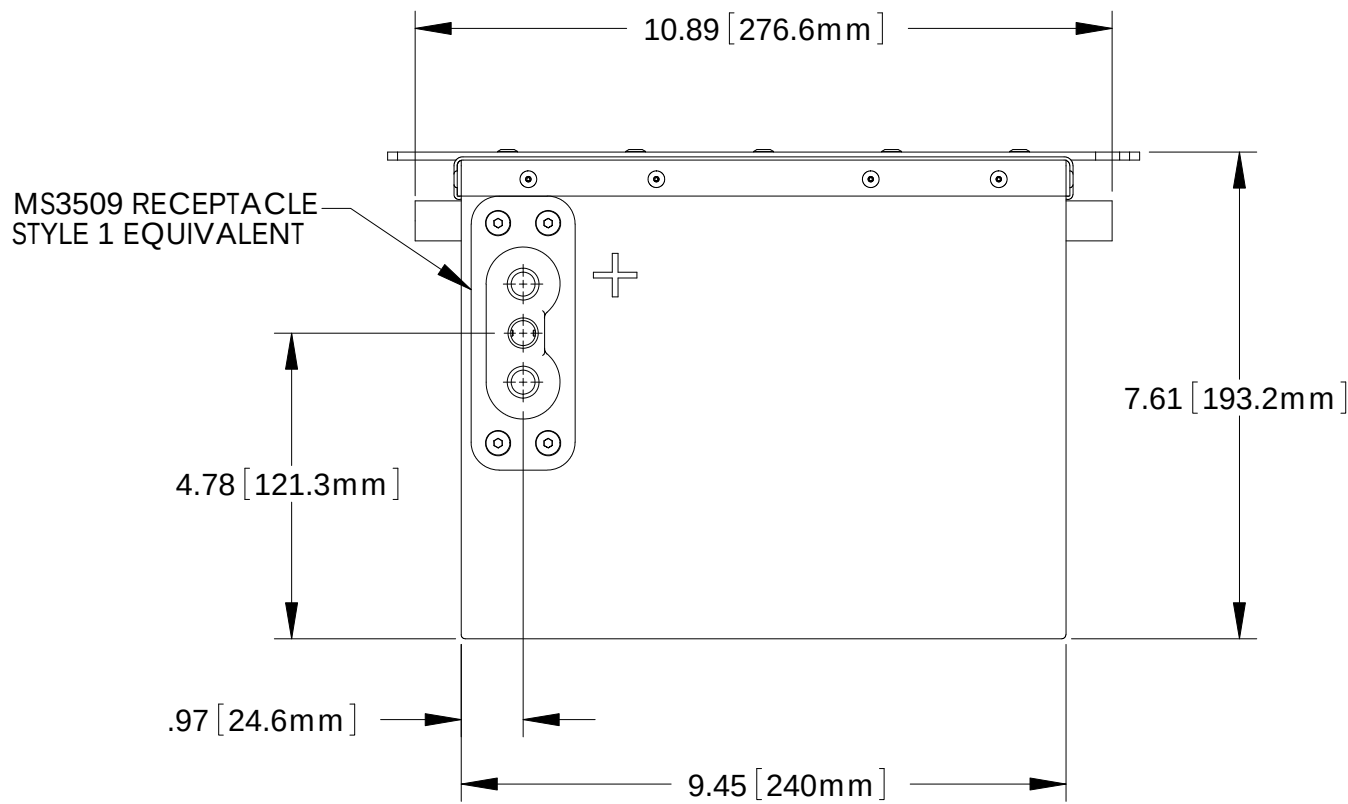


NOTES: UNLESS OTHERWISE SPECIFIED

1. MANUFACTURED AND INSPECTED IAW AS9100 QUALITY SYSTEM REQUIREMENTS.
2. ABBREVIATION USED IN TITLE IS:
VALVE REGULATED SEALED LEAD ACID (VRSLA)
3. SEE DRAWING NO. CB-00317 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
4. BATTERIES ARE RATED IAW INTERNATIONAL ELECTROTECHNICAL COMMISSION STANDARD 60952-1 AND RTCA STANDARD DO-293, UNLESS OTHERWISE NOTED.
5. DIMENSIONS ARE INCH [MILLIMETERS]

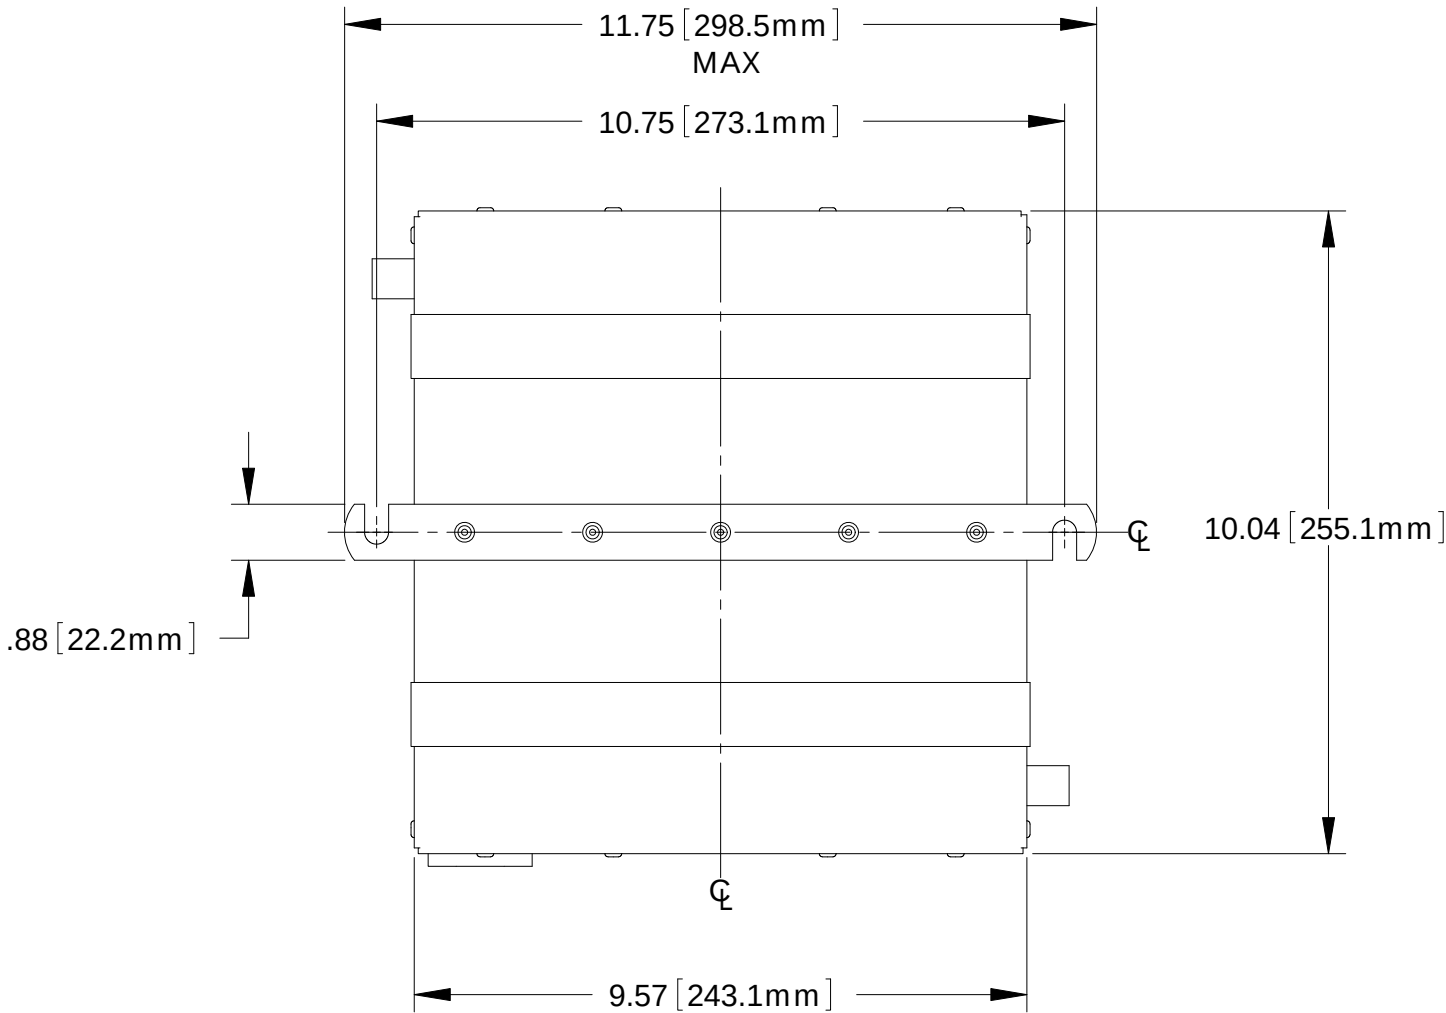

PART NUMBER	RG-209
MAXIMUM WEIGHT	50.0 LBS [22.7 KG]
RATED CAPACITY, C ₁	22 AH
POWER RATING AT 23 °C	lpp 900 A, lpr 600 A
POWER RATING AT -18 °C	lpp 700 A, lpr 525 A
POWER RATING AT -30 °C	lpp 575 A, lpr 425 A

ENVELOPE DRAWING

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/32 .XX ± .06 ±1° .XXX ± .030		CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790	
		APPROVALS	DATE	TITLE BATTERY, VRSLA, 24 VOLT	
		DRAWN R.MURRIETTA	9/28/09		
TREATMENT	NONE	CHECKED	NS	1/3/11	SIZE C CAGE CODE 63017 DWG NO. RG-209 REV
FINISH	NONE	APPROVED	JBT	1/3/11	
SIMILAR TO	CALC Wt	ISSUED	JJ	1/3/11	SCALE 1:3 SHEET 1 OF 1