
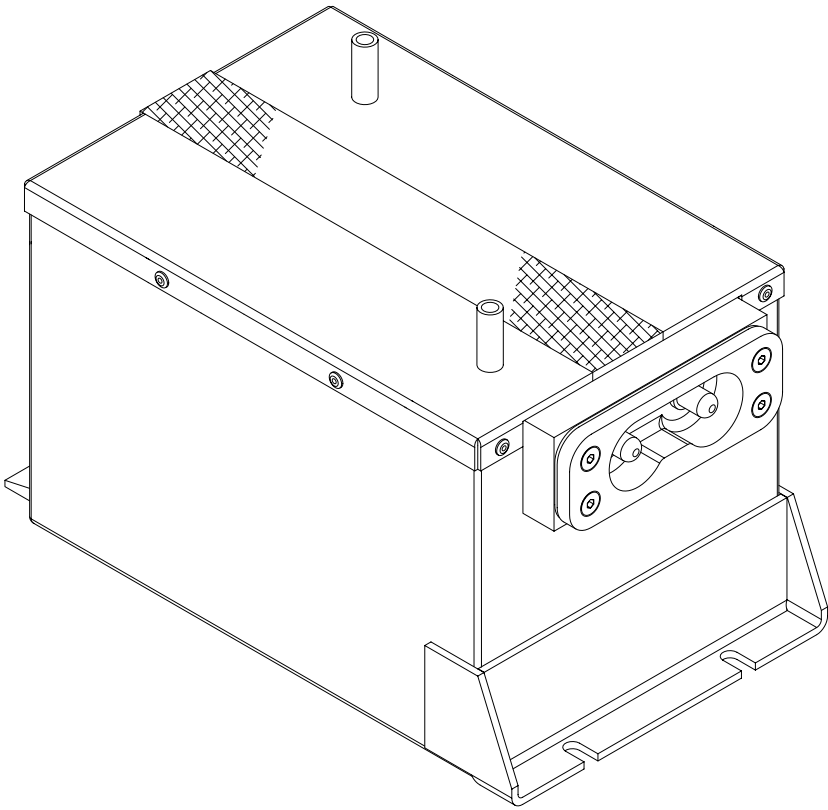



NOTES: UNLESS OTHERWISE SPECIFIED

1. BATTERY CONFORMS TO THE DESIGN REQUIREMENTS OF 14 CFR PARTS 23.1353, 25.1353(c), 27.1353, 29.1353(c).
2. INSPECT PER FAR 21.303(h) QUALITY SYSTEM.
3. ABBREVIATION USED IN TITLE IS: VALVE REGULATED LEAD ACID (VRSLA).
4. SEE DRAWING NO. CB-00349 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
5. BATTERIES ARE RATED IAW INTERNATIONAL ELECTROTECHNICAL COMMISSION STANDARD 60952-1, UNLESS OTHERWISE NOTED.
6. DIMENSIONS ARE IN INCH [MILLIMETER].


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV FRONT HOLD DOWN SLOTS & TITLE	3/25/06	JBT

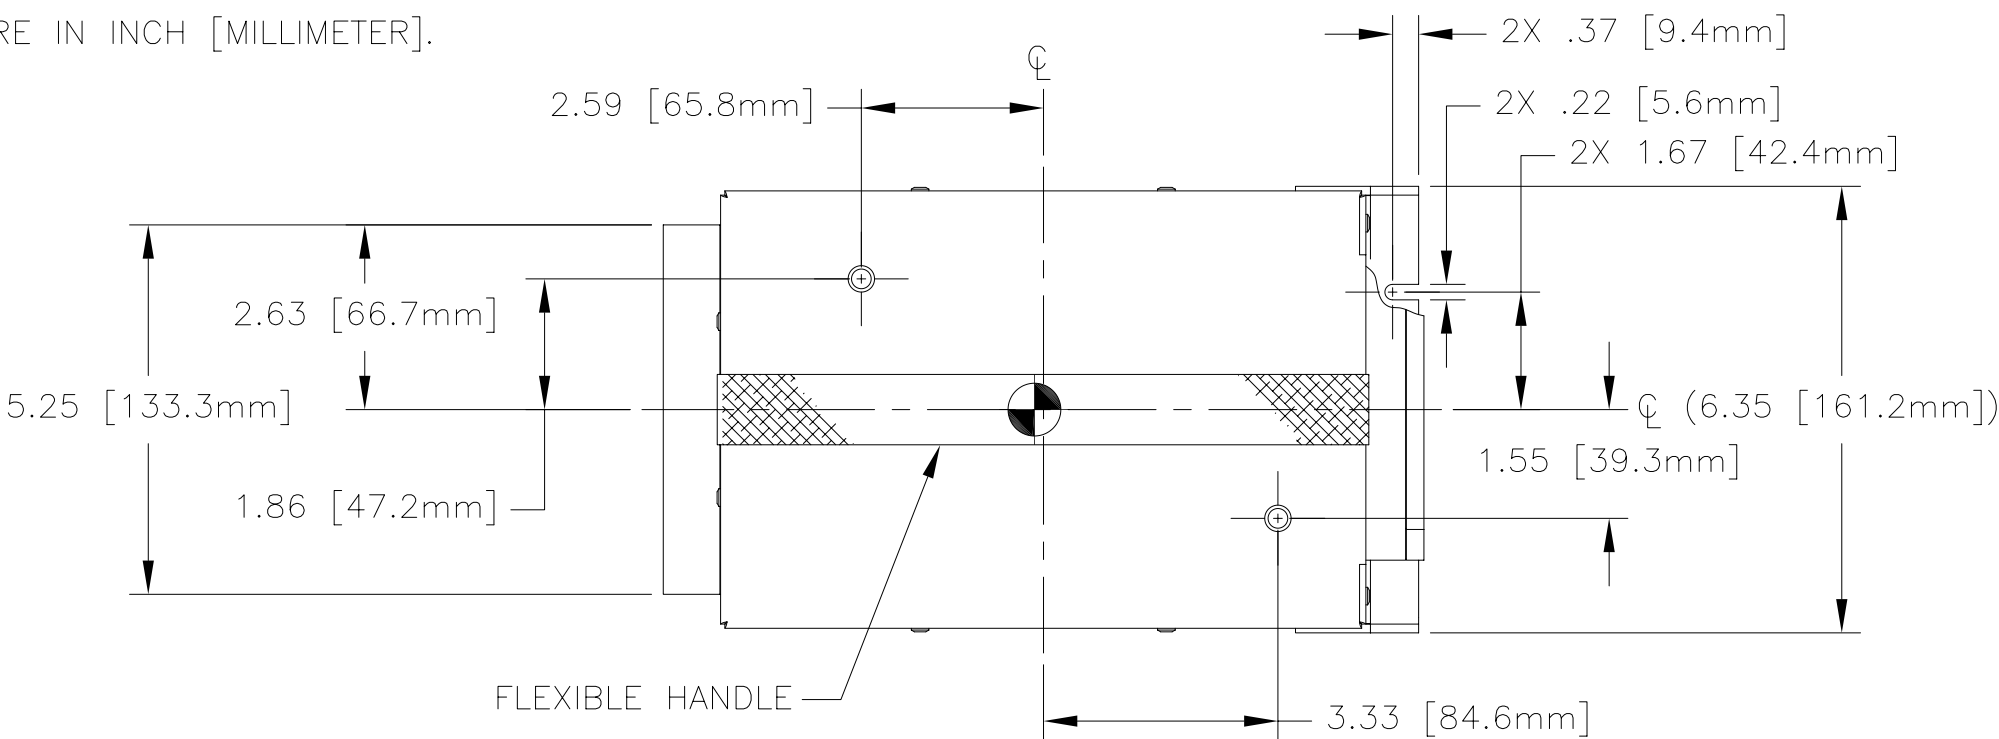

REFERENCE VIEW

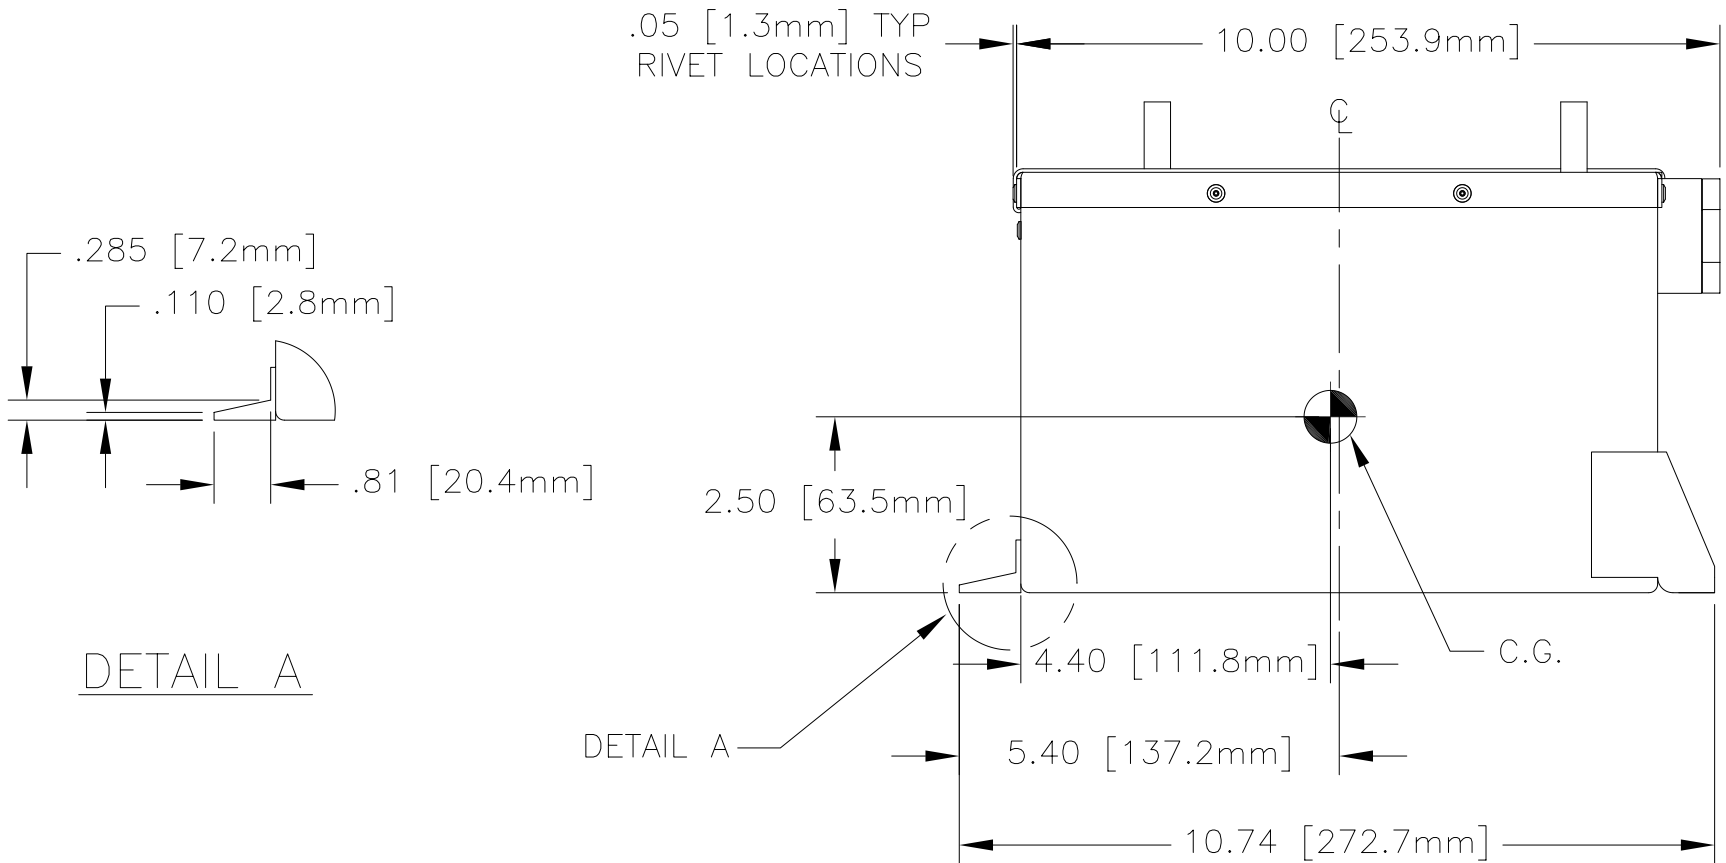

DETAIL A

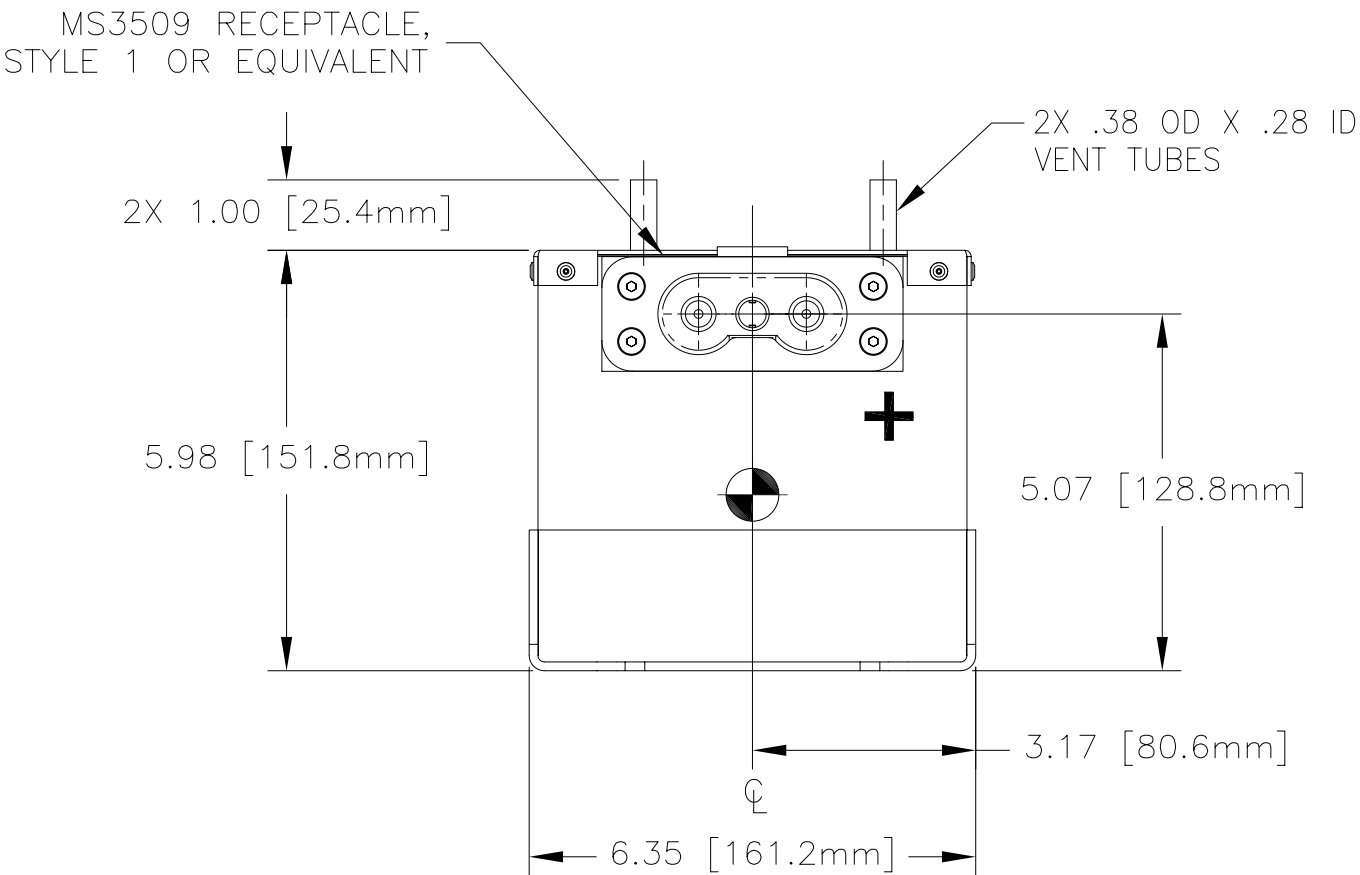

ENVELOPE DRAWING

PART NUMBER	RG-343
MAXIMUM WEIGHT	27.0 LBS [12.3 KG]
RATED CAPACITY, C ₁	11 AH
POWER RATING AT 23°C (74°F)	lpr 521 A, lpp 733 A
POWER RATING AT -18°C (0°F)	lpr 331 A, lpp 448 A
POWER RATING AT -30°C (-22°F)	lpr 204 A, lpp 313 A

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CONCORDE BATTERY CORPORATION		
FRACTIONS DECIMALS ANGLES			2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
±1/32 .XX ±.06 ±1°			TITLE		
.XXX ±.030			BATTERY, VRLA, 24 VOLT		
TREATMENT NONE			SIZE CAGE CODE DWG NO. REV		
FINISH NONE			C 63017 RG-343 A		
SIMILAR TO			SCALE NONE SHEET 1 OF 1		
ACT WT CALC WT			ISSUED NS 3/28/06		
			APPROVED JBT 1/19/06		
			CHECKED AMIII 1/18/06		
			DRAWN D. AYALA 12/1/05		
			CONTRACT NO.		

ENGINEERING COPY 28MAR06