
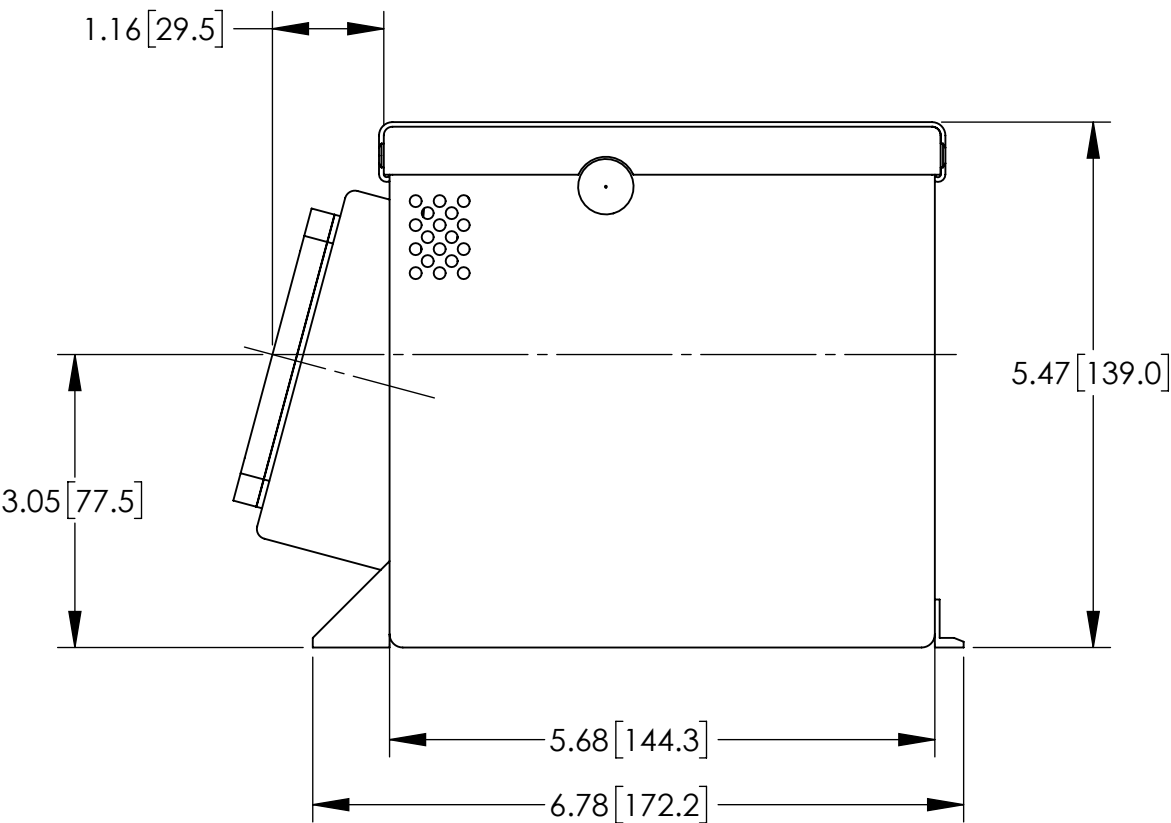
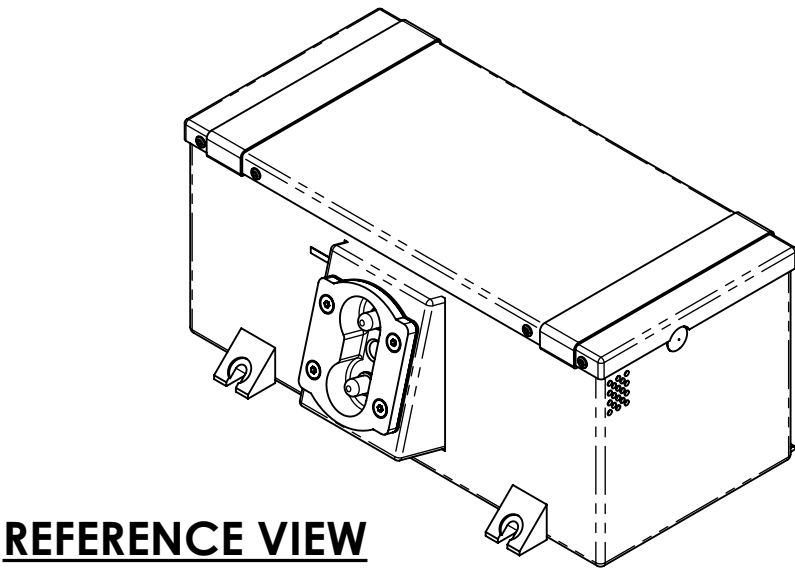


NOTES: UNLESS OTHERWISE SPECIFIED

1. MANUFACTURED AND INSPECTED IAW AS9100 QUALITY SYSTEM REQUIREMENTS.
2. ABBREVIATION USED IN TITLE IS: VALVE REGULATED SEALED LEAD ACID (VRSLA).
3. SEE DRAWING NO. CB-00316 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
4. BATTERIES ARE RATED IAW INTERNATIONAL ELECTROTECHNICAL COMMISSION STANDARD 60952-1 AND RTCA STANDARD DO-293A, UNLESS OTHERWISE NOTED.
5. DIMENSIONS ARE INCH [MILLIMETERS].

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV POWER RATINGS, AND NOTES, REDRAWN IN SOLIDWORKS	6/28/17	PH

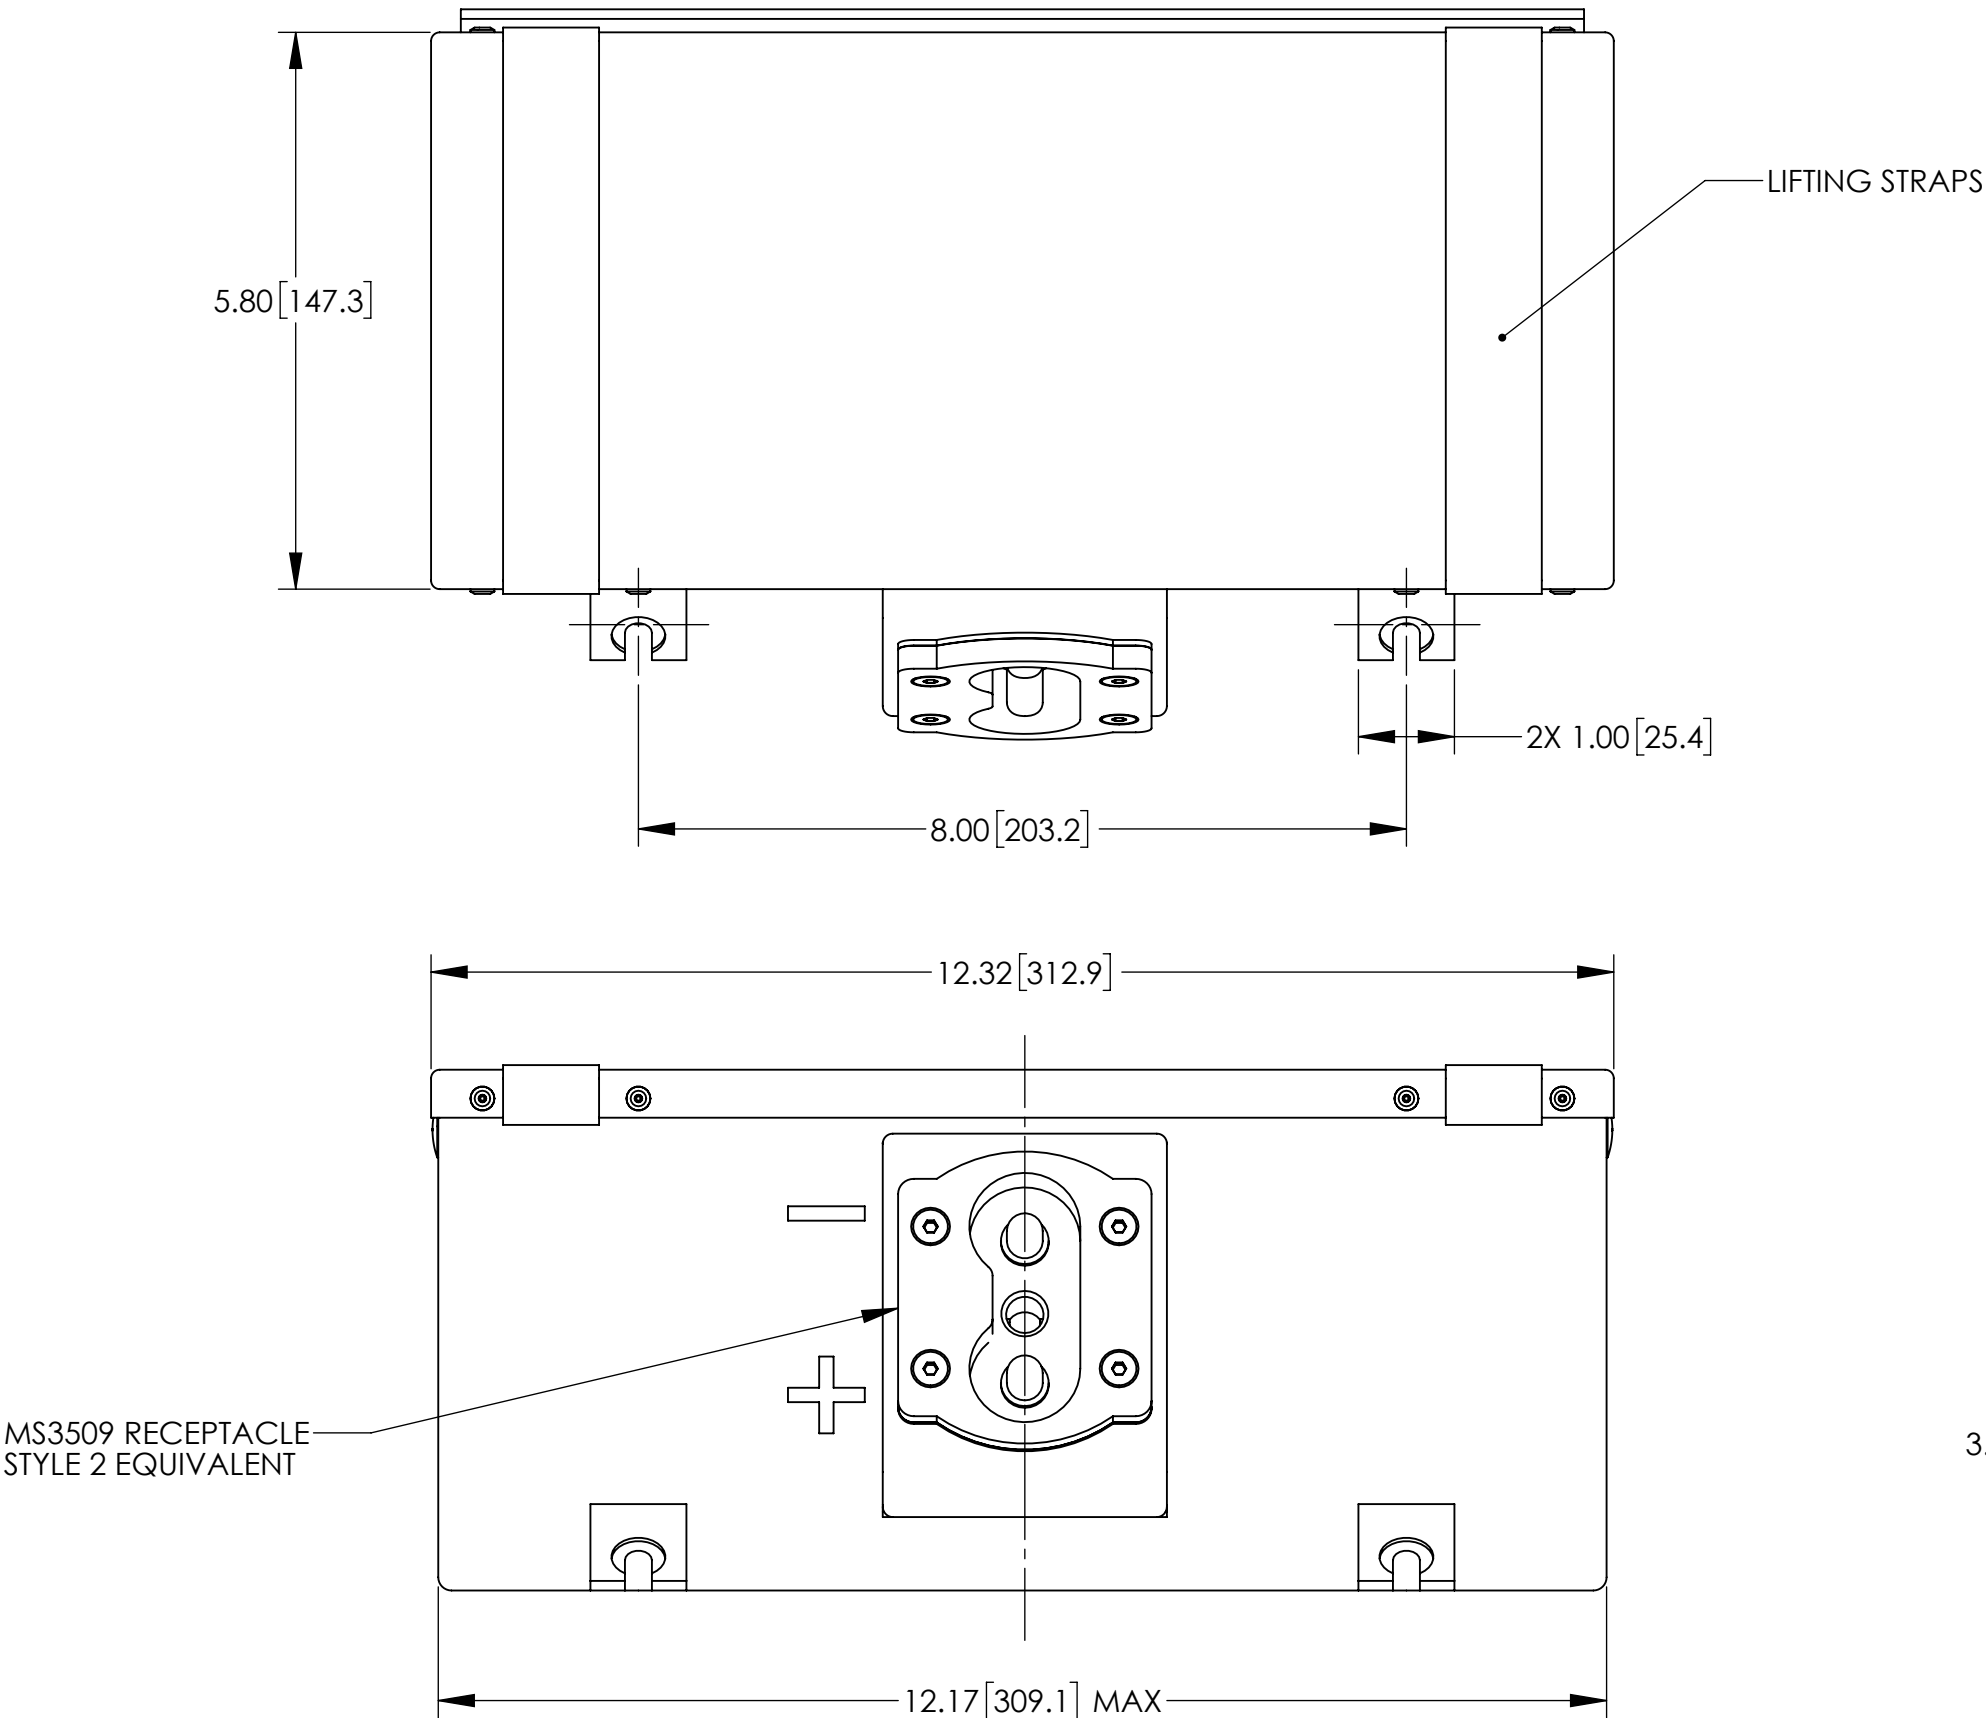

PART NUMBER	RG-385
MAXIMUM WEIGHT	34 LBS [15.4 KG]
RATED CAPACITY, C ₁	13 AH
POWER RATING AT 23°C	Ipp 700 A, Ipr 500 A
POWER RATING AT -18°C	Ipp 500 A, Ipr 325 A
POWER RATING AT -30°C	Ipp 350 A, Ipr 225 A

ENVELOPE DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/32 .XX ±.06 ±1° .XXX ±.030			CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790			
			APPROVALS		DATE	TITLE		
TREATMENT			DRAWN		8/8/01	BATTERY, VRSLA, 24 VOLT		
FINISH			CHECKED		8/8/01			
SIMILAR TO			APPROVED		8/13/01	SIZE	CAGE CODE	REV
CALC WT			ISSUED		6/29/17	C	63017	A
						DWG NO.	RG-385	
						SCALE	1:2	
						SHEET 1 OF 1		