
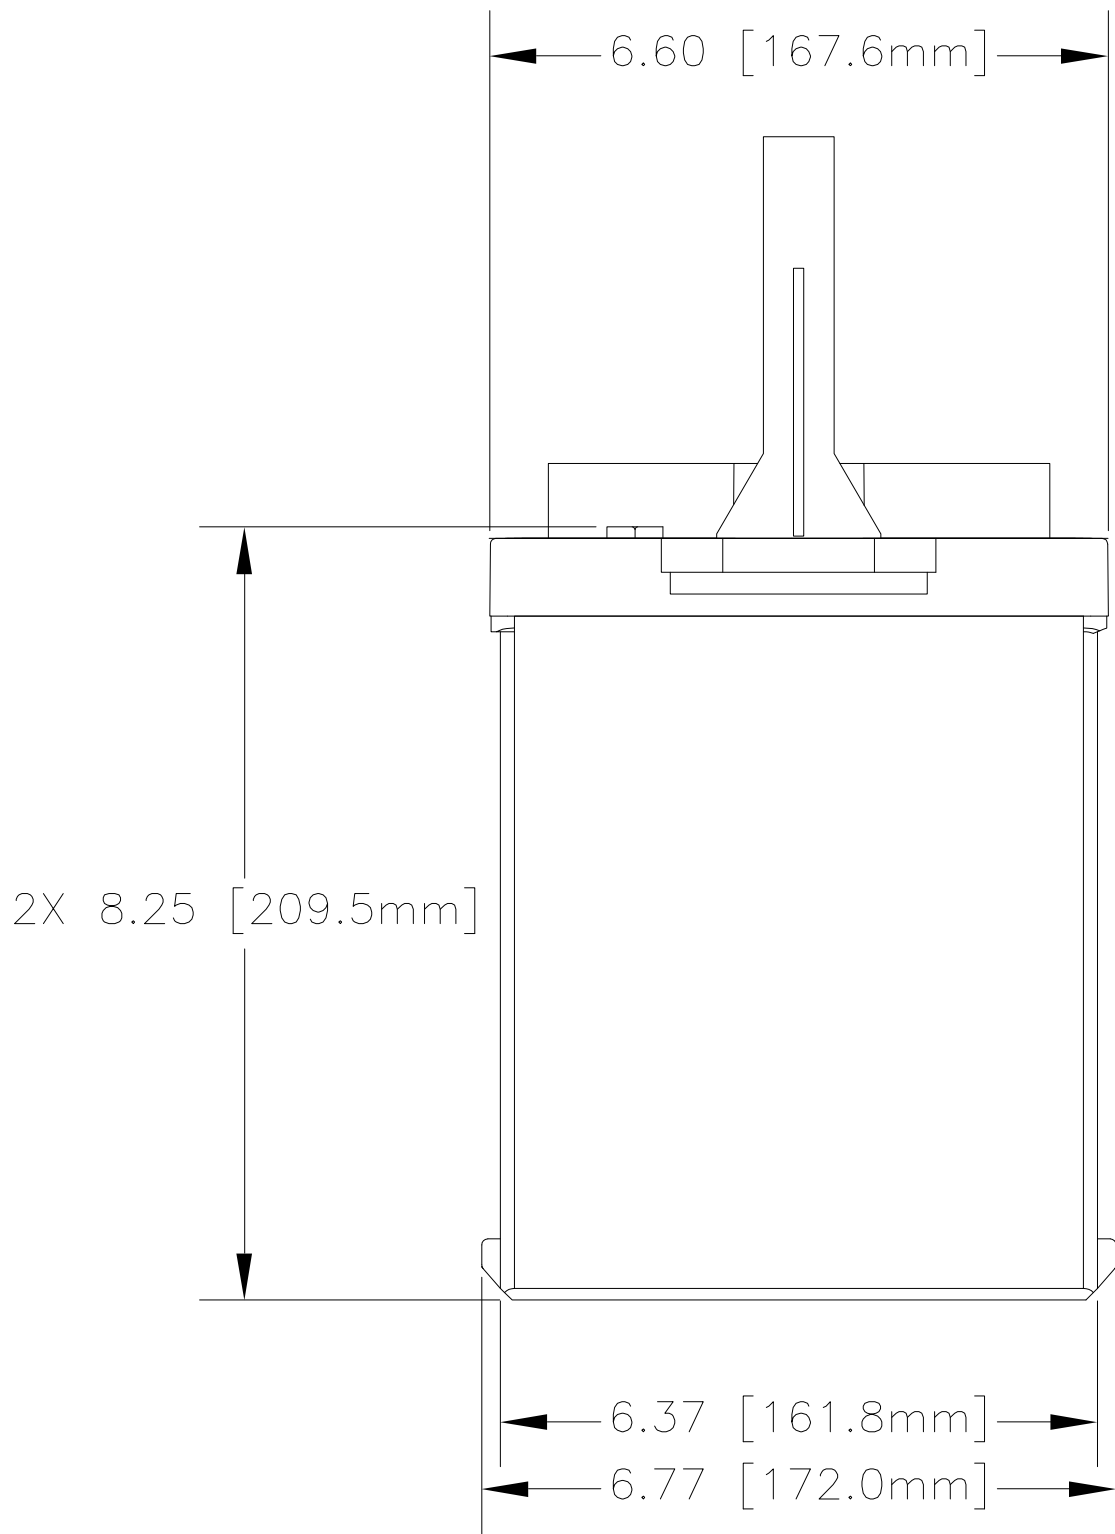
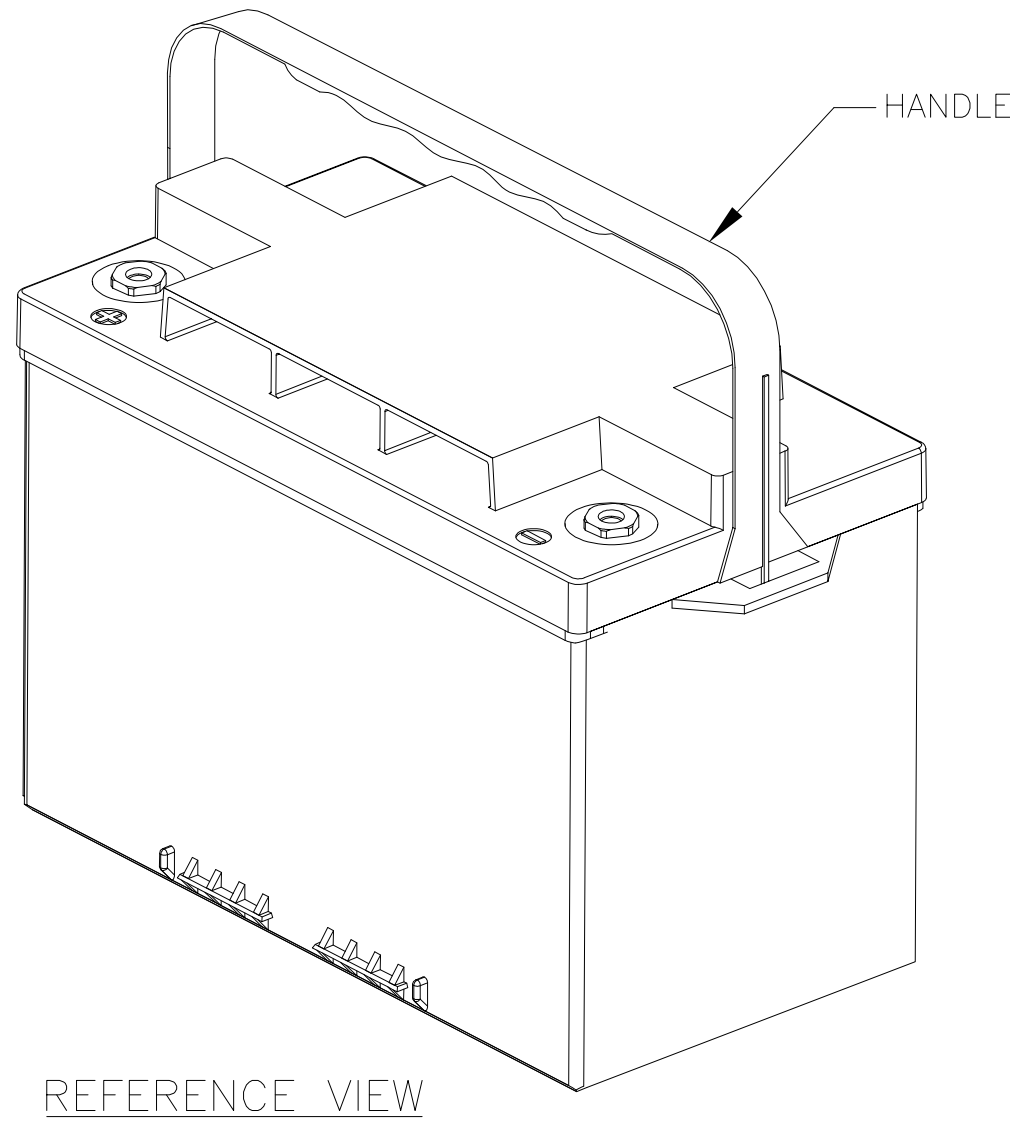
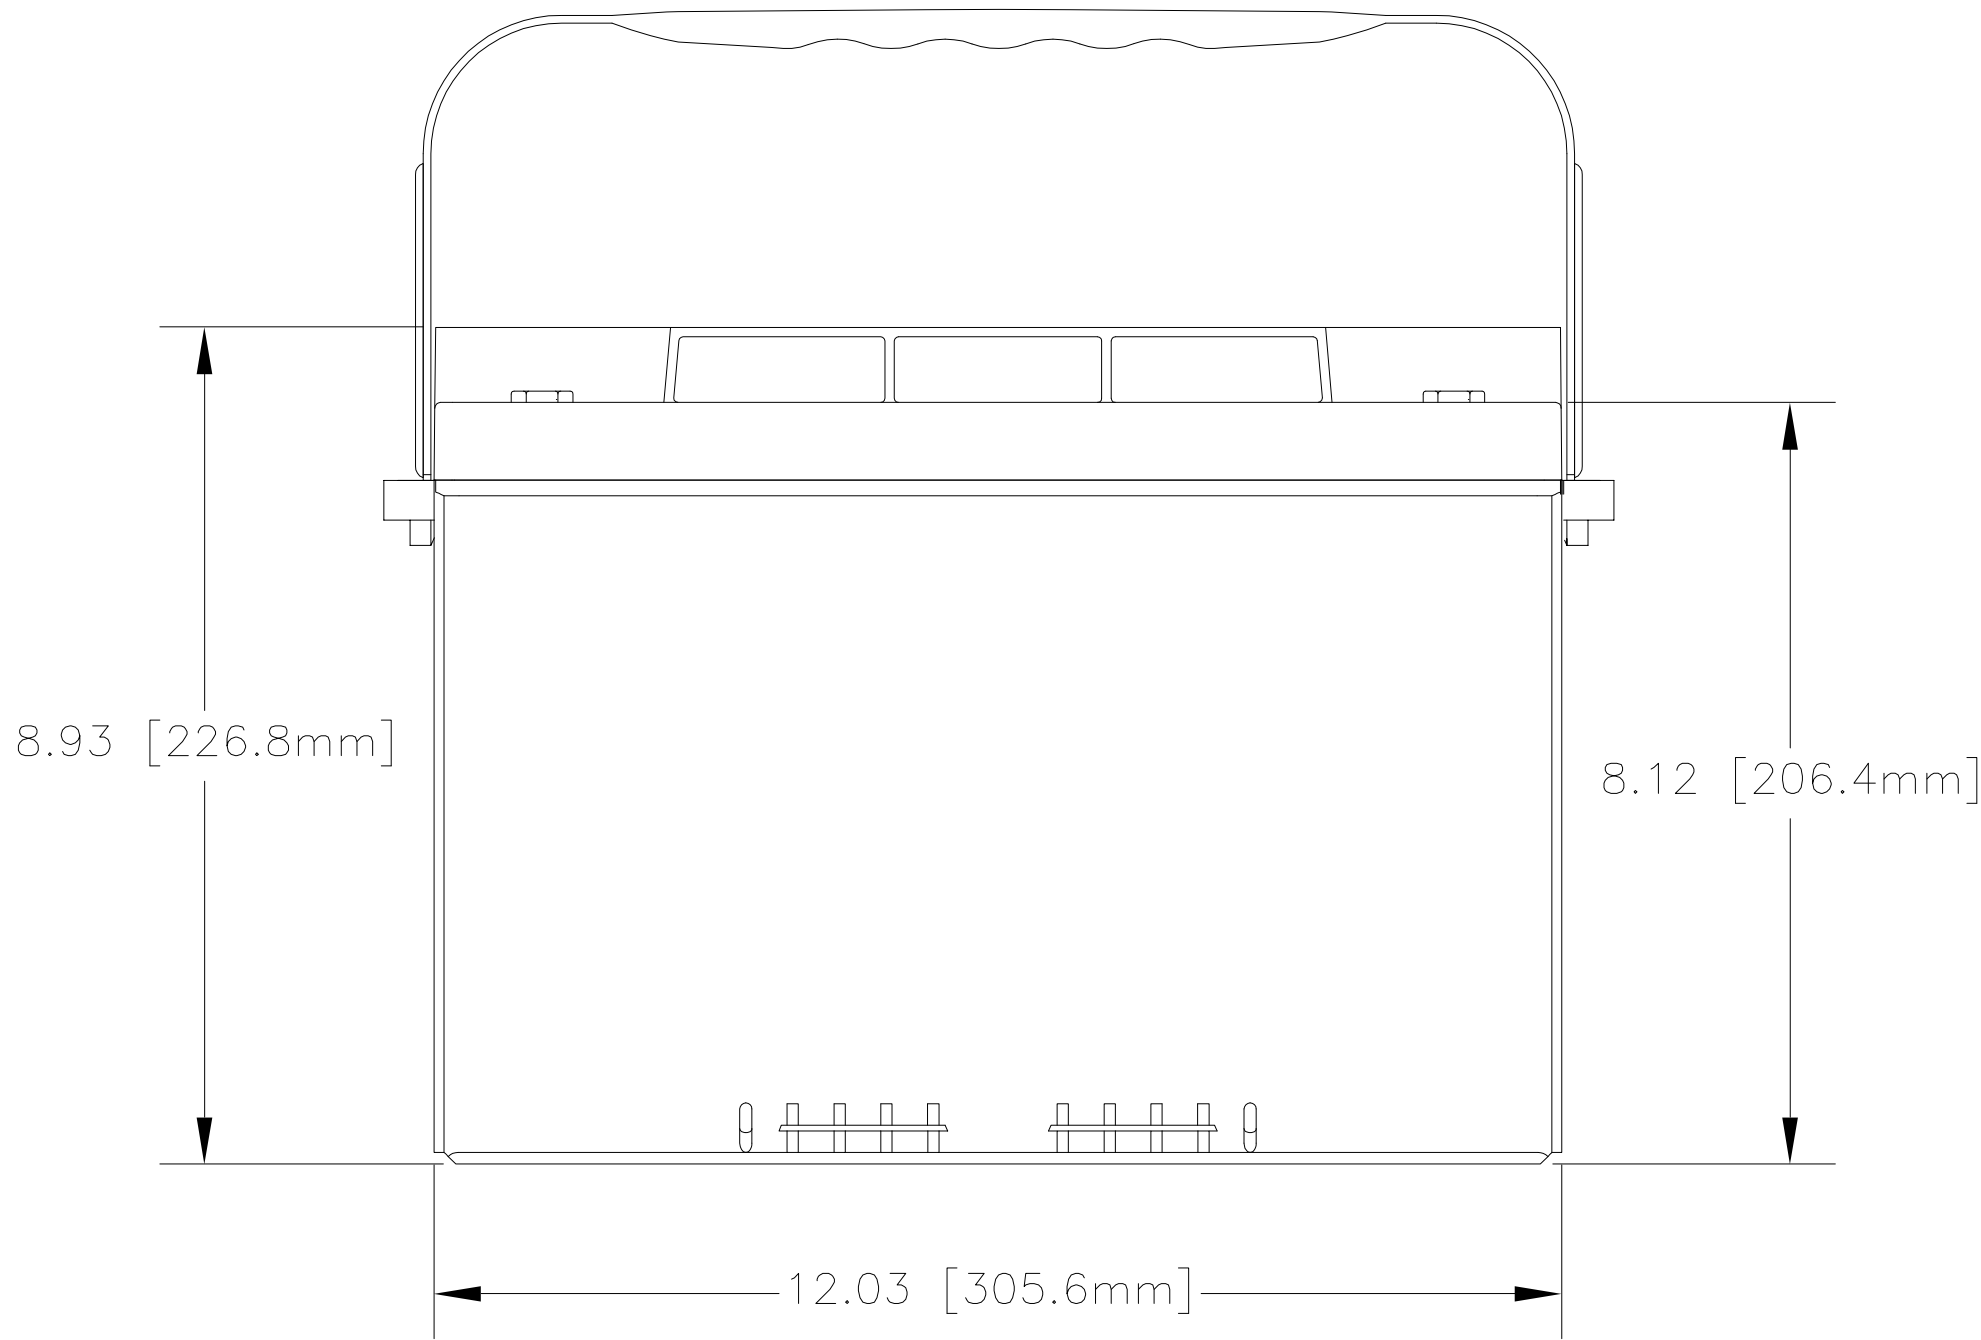


ENGINEERING COPY 21NOV02

- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. SEE DRAWING NO. CB-00285 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
 - 2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
 - 3. ALL DIMENSIONS ARE IN INCHES [MM].
 - 4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

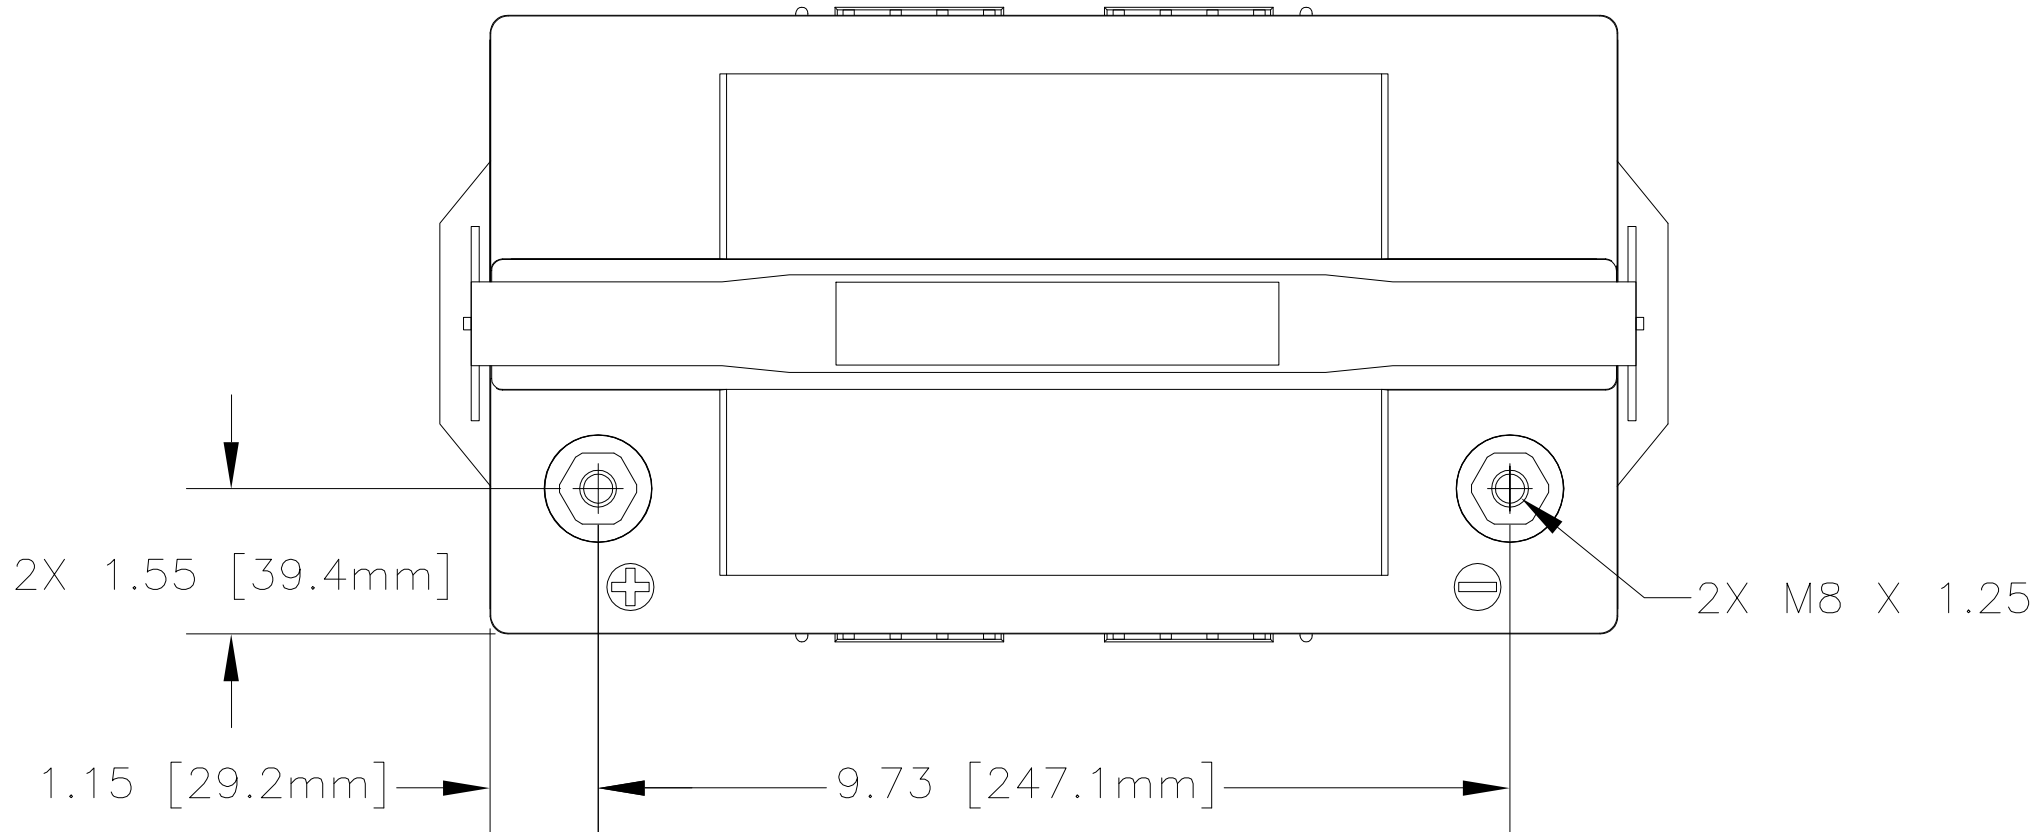

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-1040HT
NOMINAL WEIGHT	66 LBS [30 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	104 AH

QTY REQD		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION				MATERIAL SPECIFICATION		ITEM NO.
PARTS LIST											
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .030				CONTRACT NO. NA			CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790				
				APPROVALS		DATE	TITLE BATTERY, SLA, 12 VOLT, PVX-1040HT				
				DRAWN S.FRAZIER		11/7/02					
				TREATMENT NONE		CHECKED HRF	11/8/02	SIZE CAGE CODE DWG NO.		REV	
				FINISH NONE		APPROVED JBT	11/15/02	C 63017 PVX-1040HT			
SIMILAR TO NA		ACT WT NA	CALC WT NA	ISSUED AT	11/21/02	SCALE NONE		SHEET 1 OF 1			