



ENGINEERING COPY 13JUN03

- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. SEE DRAWING NO. CB-00279 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
 - 2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
 - 3. ALL DIMENSIONS ARE IN INCHES [MM].
 - 4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

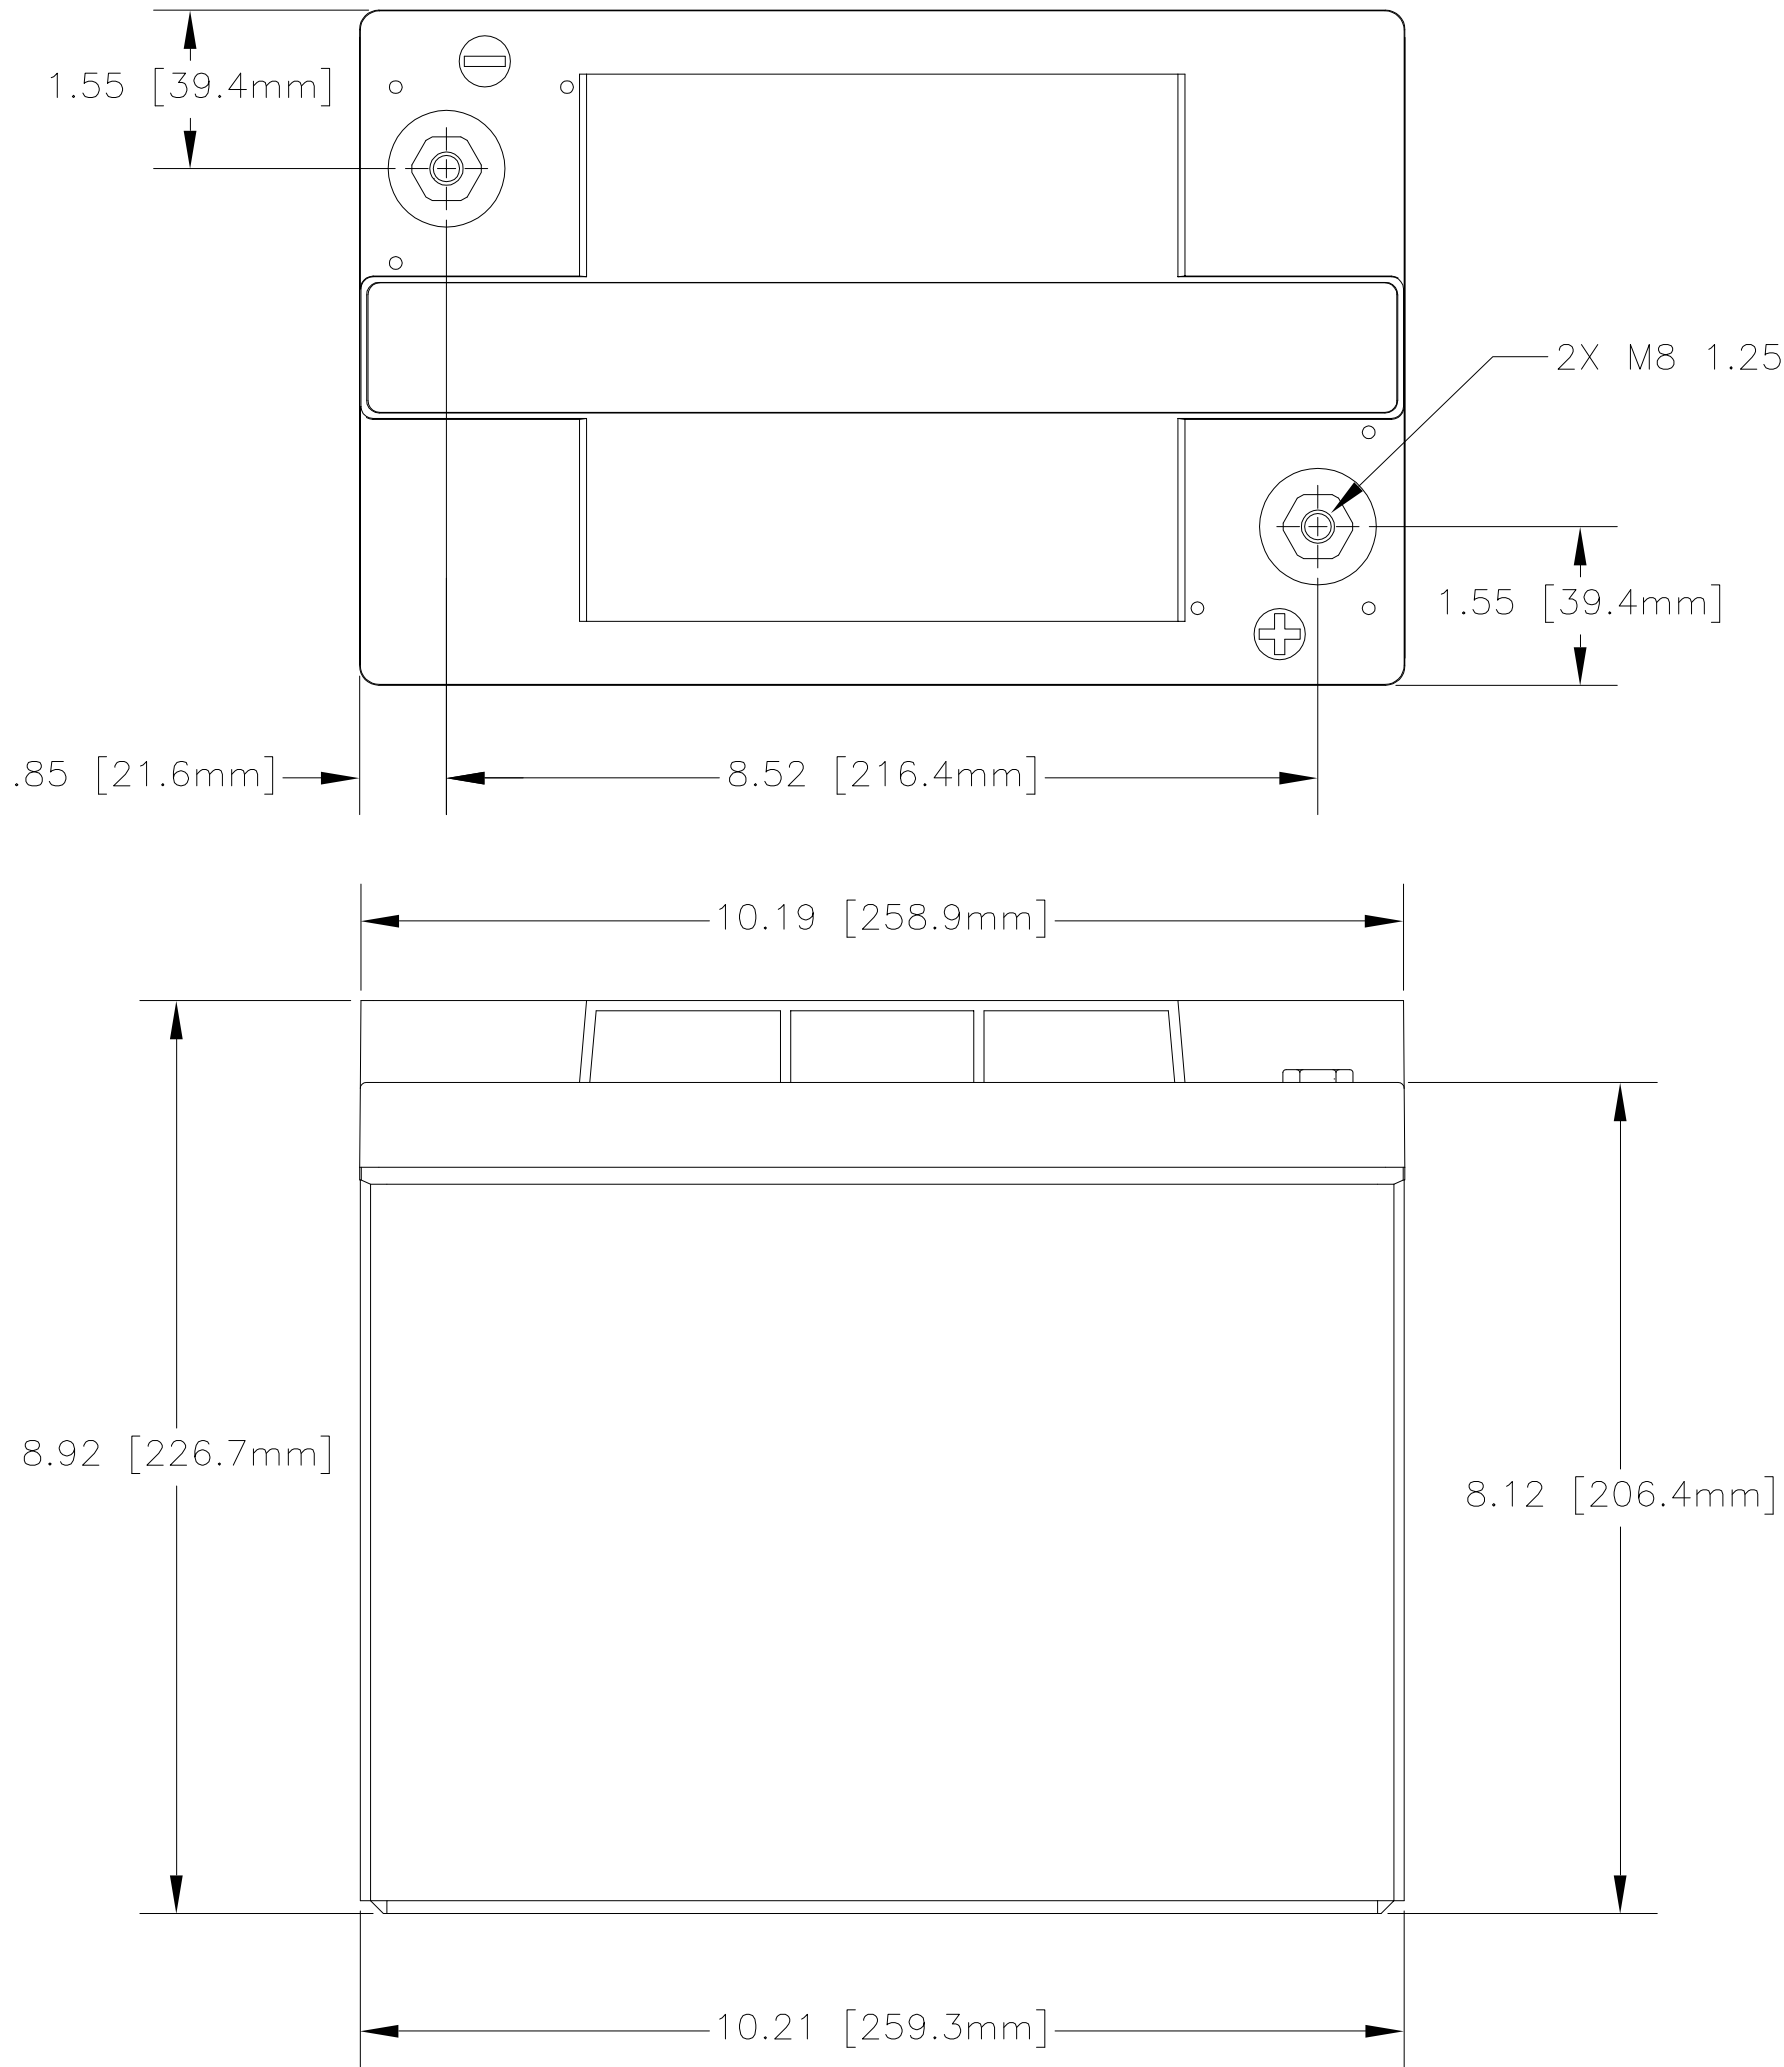


CAPACITY RATINGS		
PART NUMBER	PVX-1380T	PVX-1680T
NOMINAL WEIGHT	51 LBS [23.2 KG]	57 LBS [25.9 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	138 AH	168 AH

REMOVABLE
TERMINAL PROTECTOR

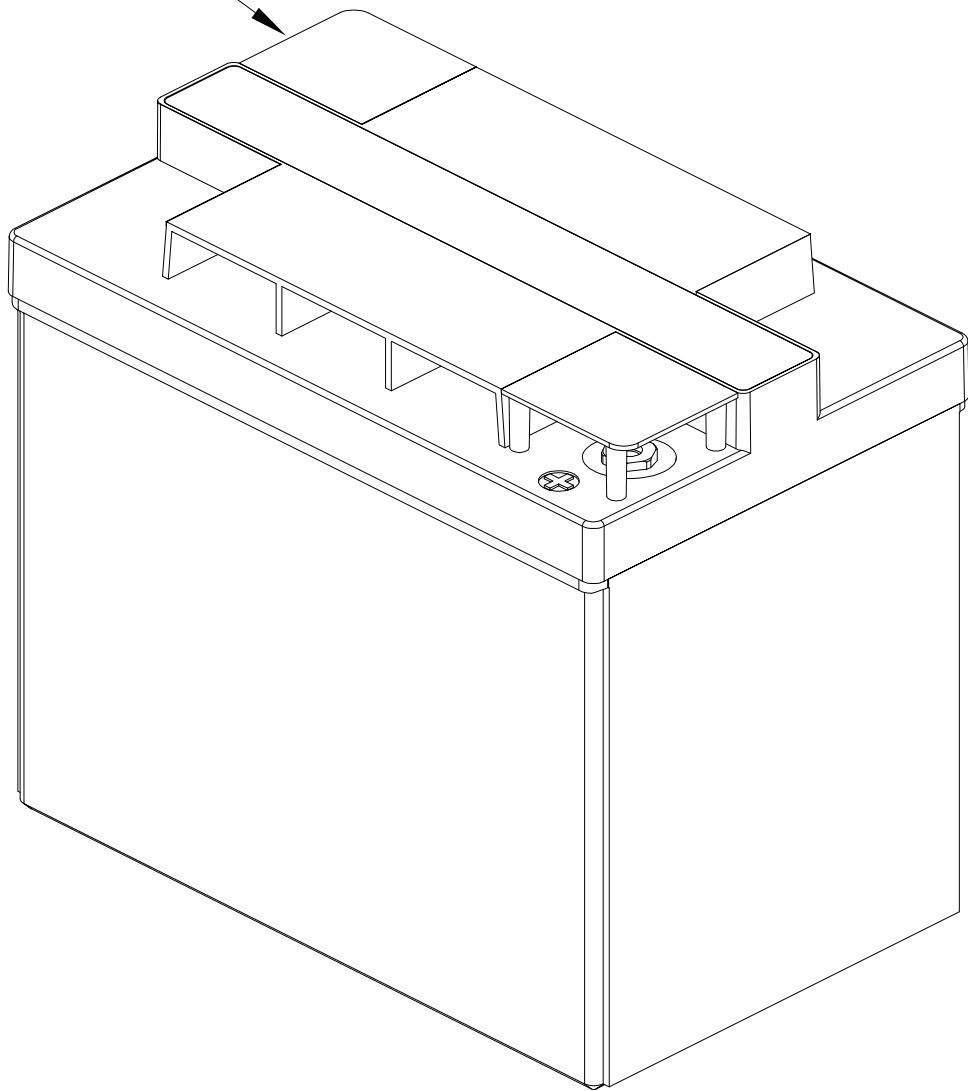

REFERENCE VIEW

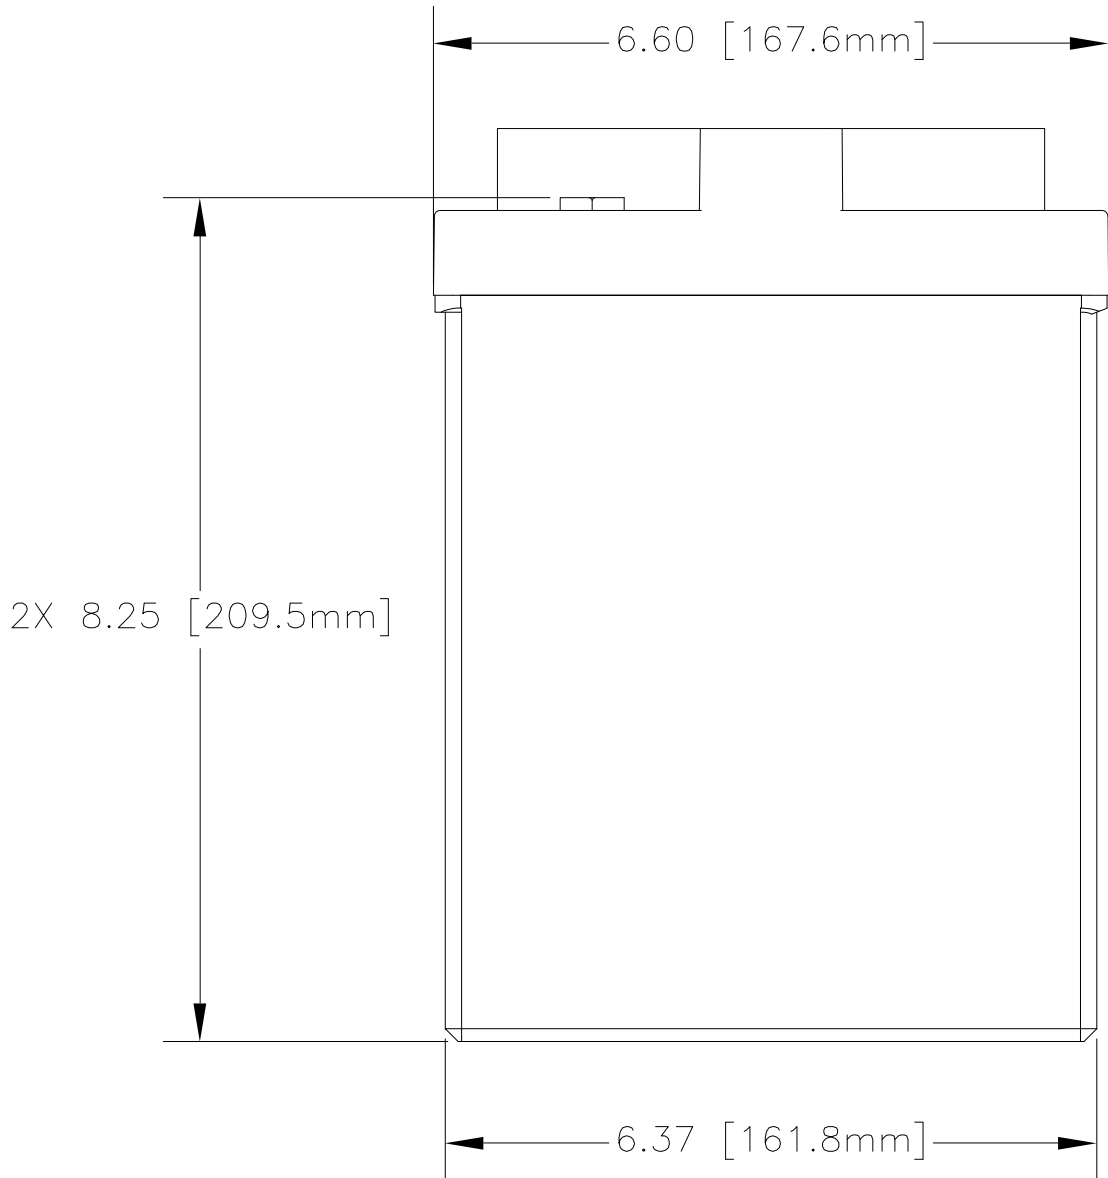

ENVELOPE DRAWING

QTY REQD		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION			MATERIAL SPECIFICATION		ITEM NO.
PARTS LIST										
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .030 TREATMENT NONE FINISH NONE SIMILAR TO NA ACT WT NA CALC WT NA				CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790				
				NA						
				APPROVALS		DATE	TITLE BATTERY, SLA, 6 VOLT, PVX-1680T SERIES			
				DRAWN ELH		8/13/01				
				CHECKED HRF		8/21/01				
APPROVED JBT		8/23/01	SIZE C	CAGE CODE 63017		DWG NO.	PVX-1680T		REV A	
ISSUED JBT		6/13/03	SCALE NONE					SHEET 1 OF 1		