



ENGINEERING COPY 13JUN03

- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. SEE DRAWING NO. CB-00286 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
 - 2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
 - 3. ALL DIMENSIONS ARE IN INCHES [MM].
 - 4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

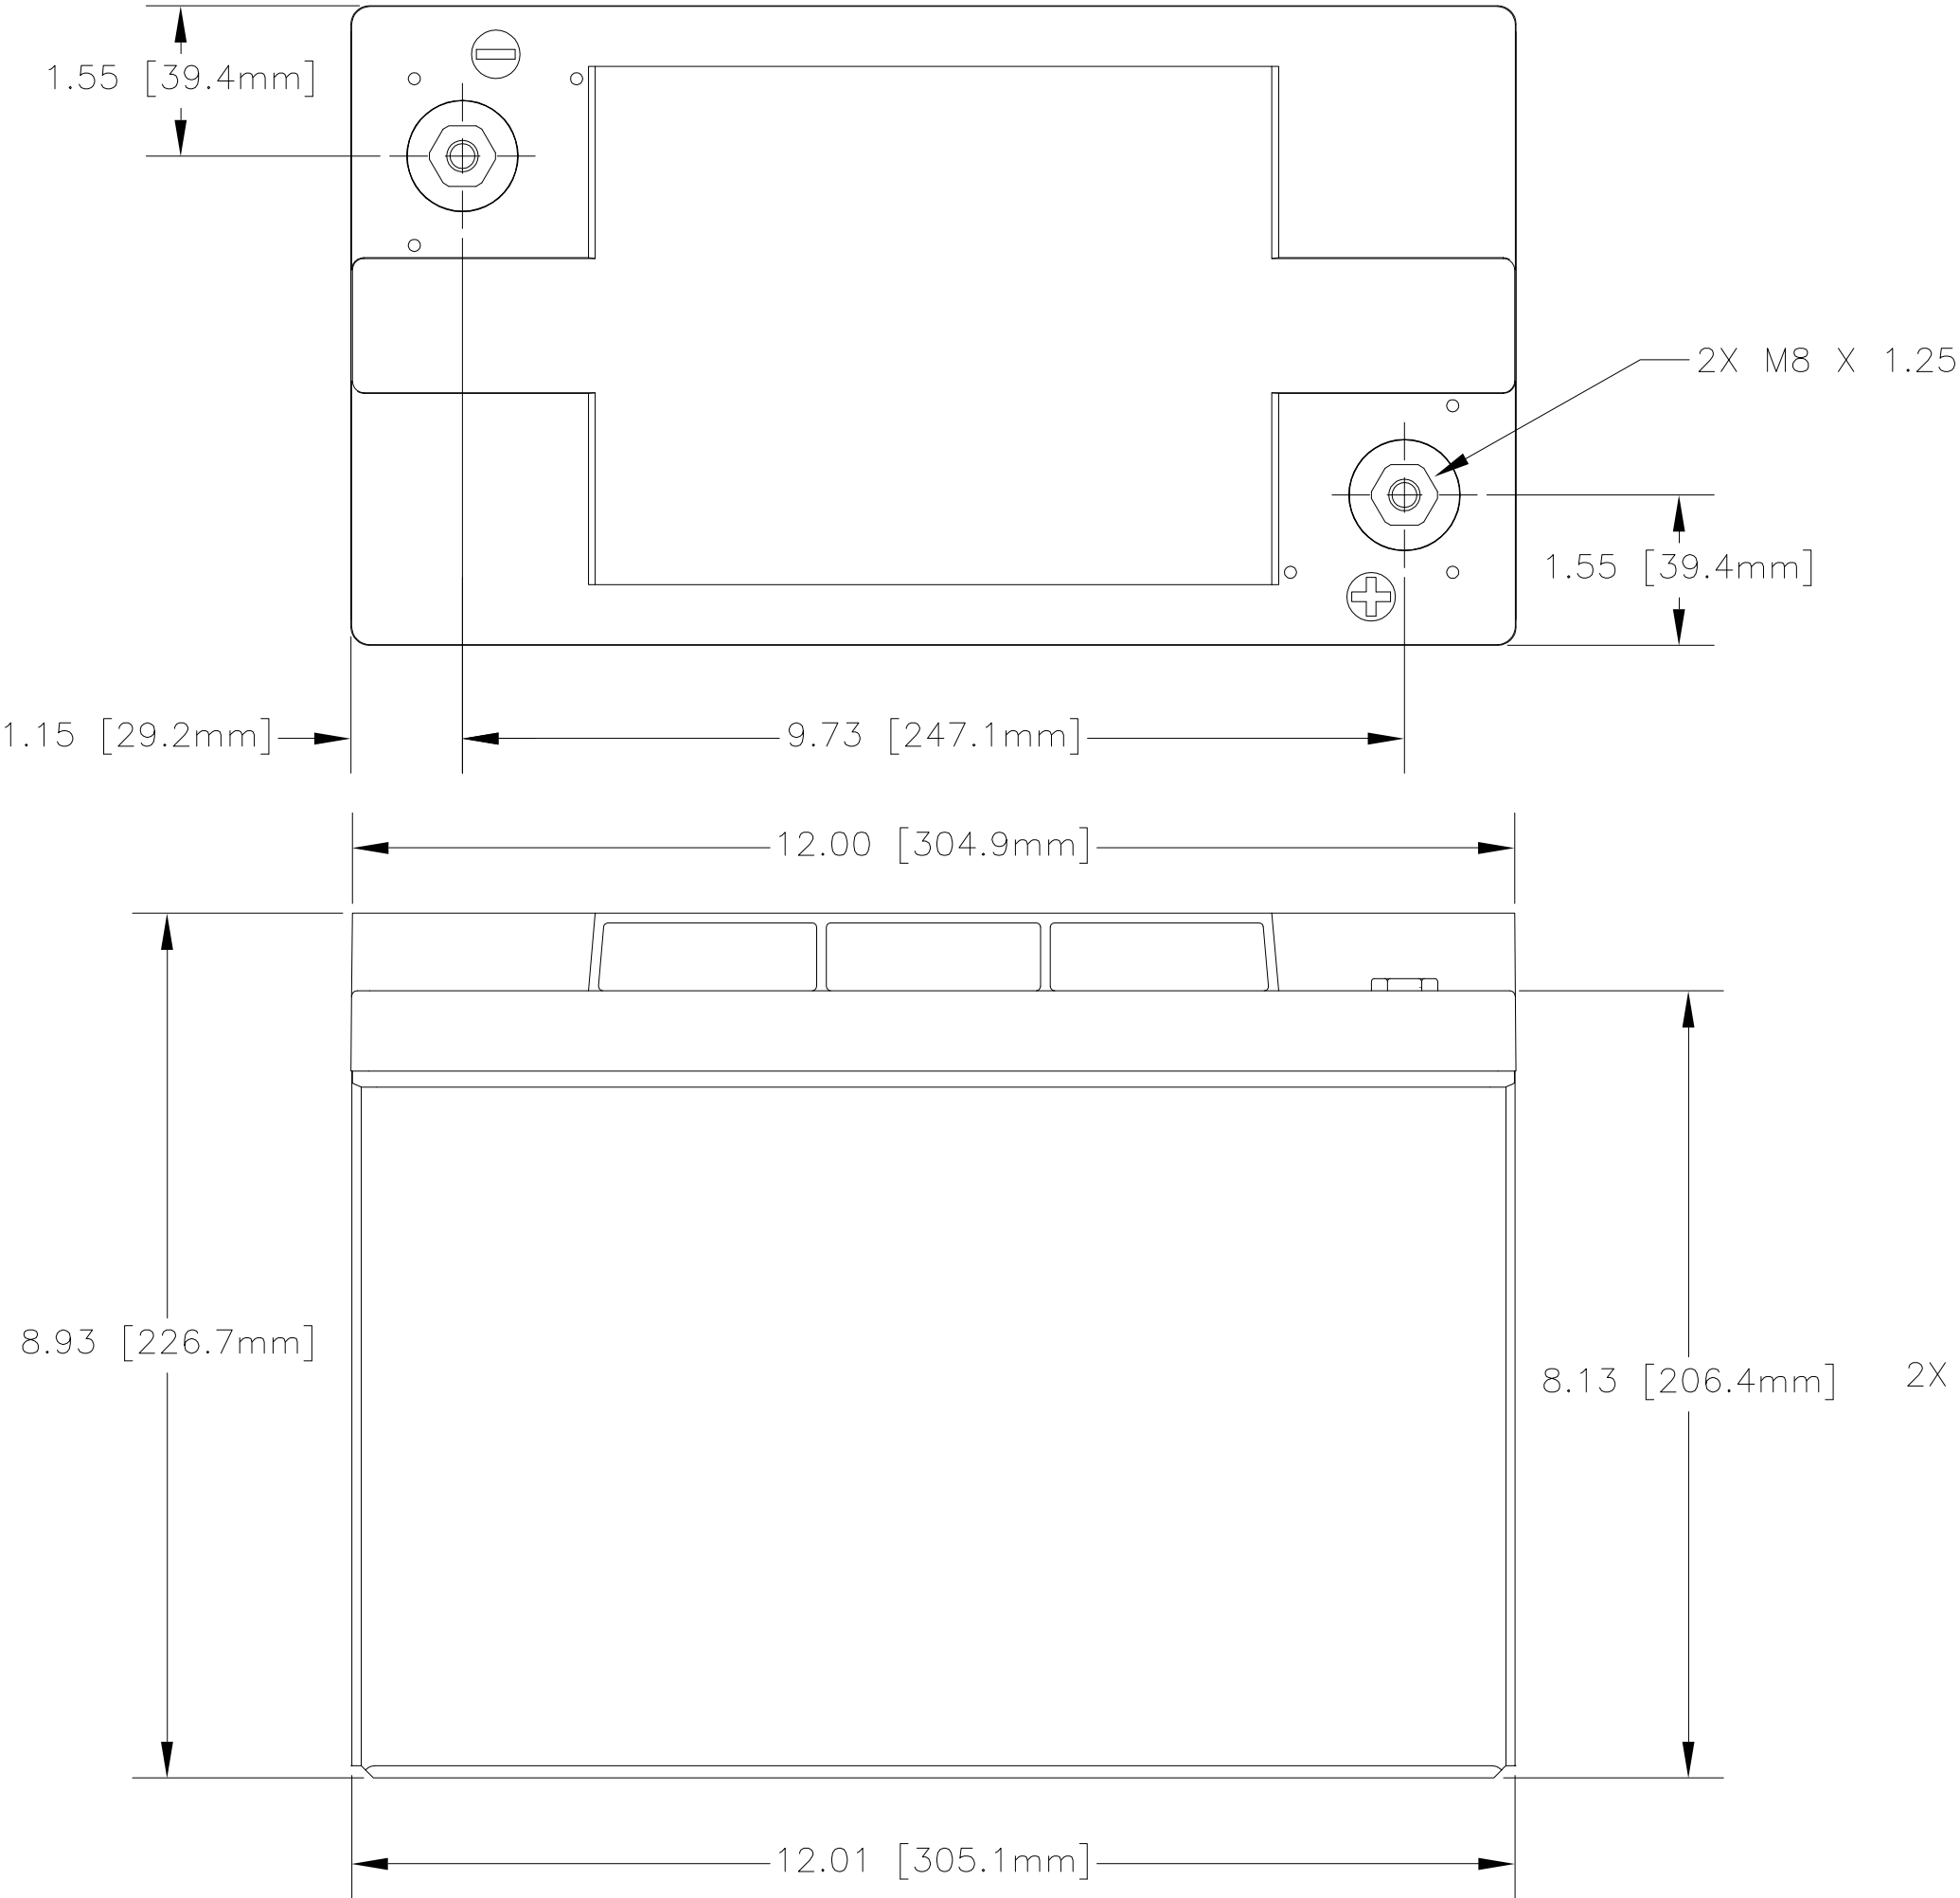


CAPACITY RATINGS	
PART NUMBER	PVX-2080T
NOMINAL WEIGHT	66 LBS [30 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	208 AH

REMOVABLE
TERMINAL PROTECTOR

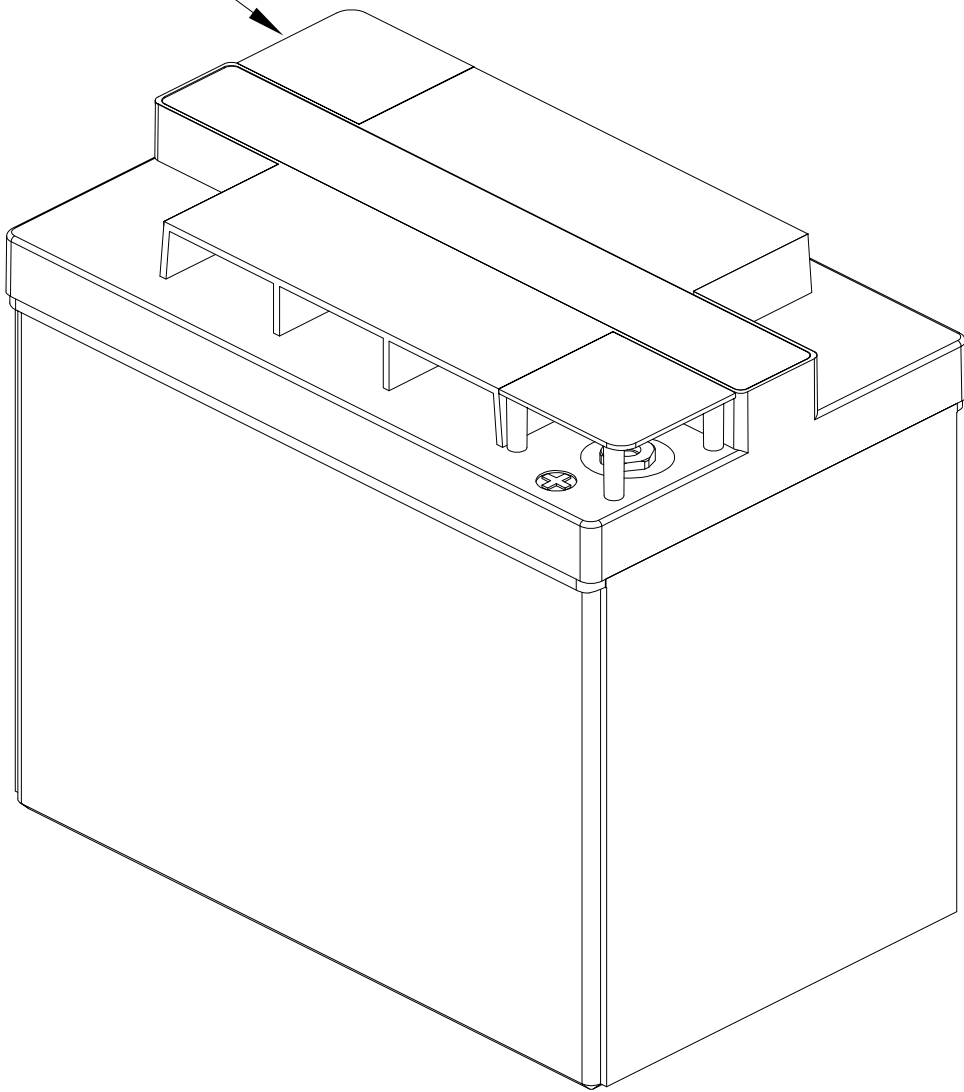

REFERENCE VIEW

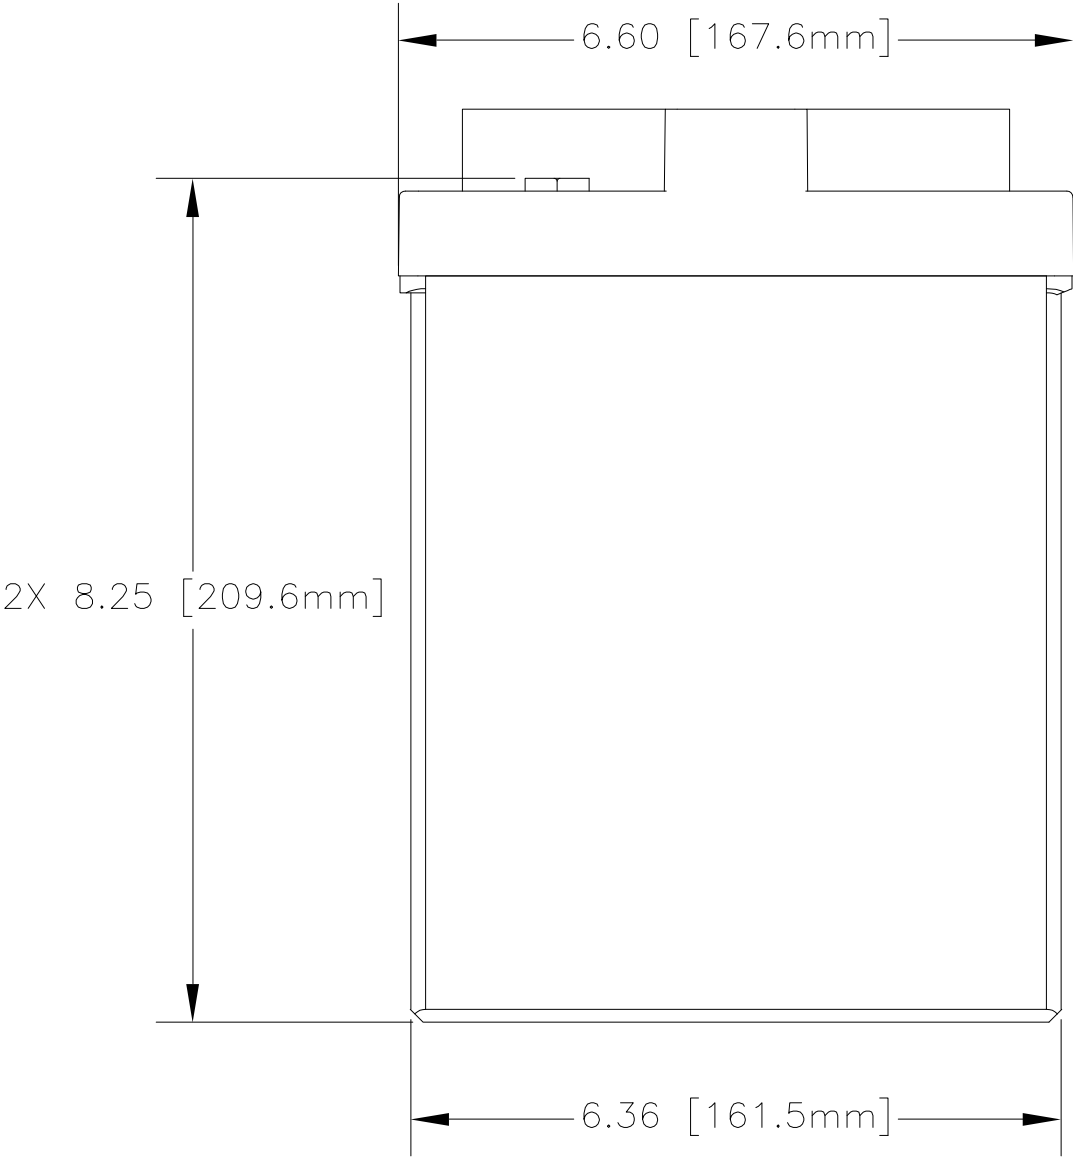

ENVELOPE DRAWING

		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION			MATERIAL SPECIFICATION		ITEM NO.				
QTY REQD		PARTS LIST												
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .030				CONTRACT NO. NA		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790								
				APPROVALS		DATE	TITLE BATTERY, SLA, 6 VOLT, PVX-2080T							
				DRAWN	ELH	8/13/01								
				TREATMENT		NONE	CHECKED	HRF	8/21/01	SIZE	CAGE CODE		DWG NO.	REV
				FINISH		NONE	APPROVED	JBT	8/23/01	C	63017		PVX-2080T	
SIMILAR TO NA		ACT WT NA	CALC WT NA	ISSUED	AT	6/13/03	SCALE	NONE		SHEET		1	OF	1