


NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00287 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.


2. ALL TESTINGS ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.

3. ALL DIMENSIONS ARE IN INCHES [MM].


4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

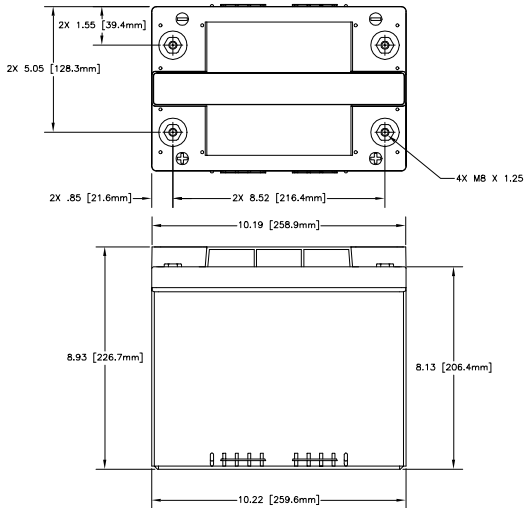

REMOVABLE
TERMINAL PROTECTOR



REFERENCE VIEW

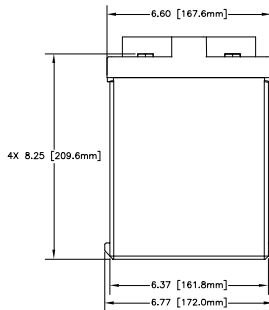

ENVELOPE DRAWING

CAPACITY RATE		
PART NUMBER	PVX-4140T	PVX-5040T
NOMINAL WEIGHT	51 LBS [23.2 KG]	57 LBS [25.9 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	414 AH	504 AH

REV	DESCRIPTION	DATE	APPROVED
1	CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD., W. COVINA, CA 91790 BATTERY, SLA, 2 VOLT, PVX-5040T SERIES	8/23/01	JST
2	CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD., W. COVINA, CA 91790 BATTERY, SLA, 2 VOLT, PVX-5040T SERIES	8/24/01	AT

REV	DESCRIPTION	DATE	APPROVED
1	CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD., W. COVINA, CA 91790 BATTERY, SLA, 2 VOLT, PVX-5040T SERIES	8/23/01	JST
2	CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD., W. COVINA, CA 91790 BATTERY, SLA, 2 VOLT, PVX-5040T SERIES	8/24/01	AT