



ENGINEERING COPY 13JUN03


- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. SEE DRAWING NO. CB-00280 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
 - 2. ALL TESTINGS ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
 - 3. ALL DIMENSIONS ARE IN INCHES [MM].
 - 4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

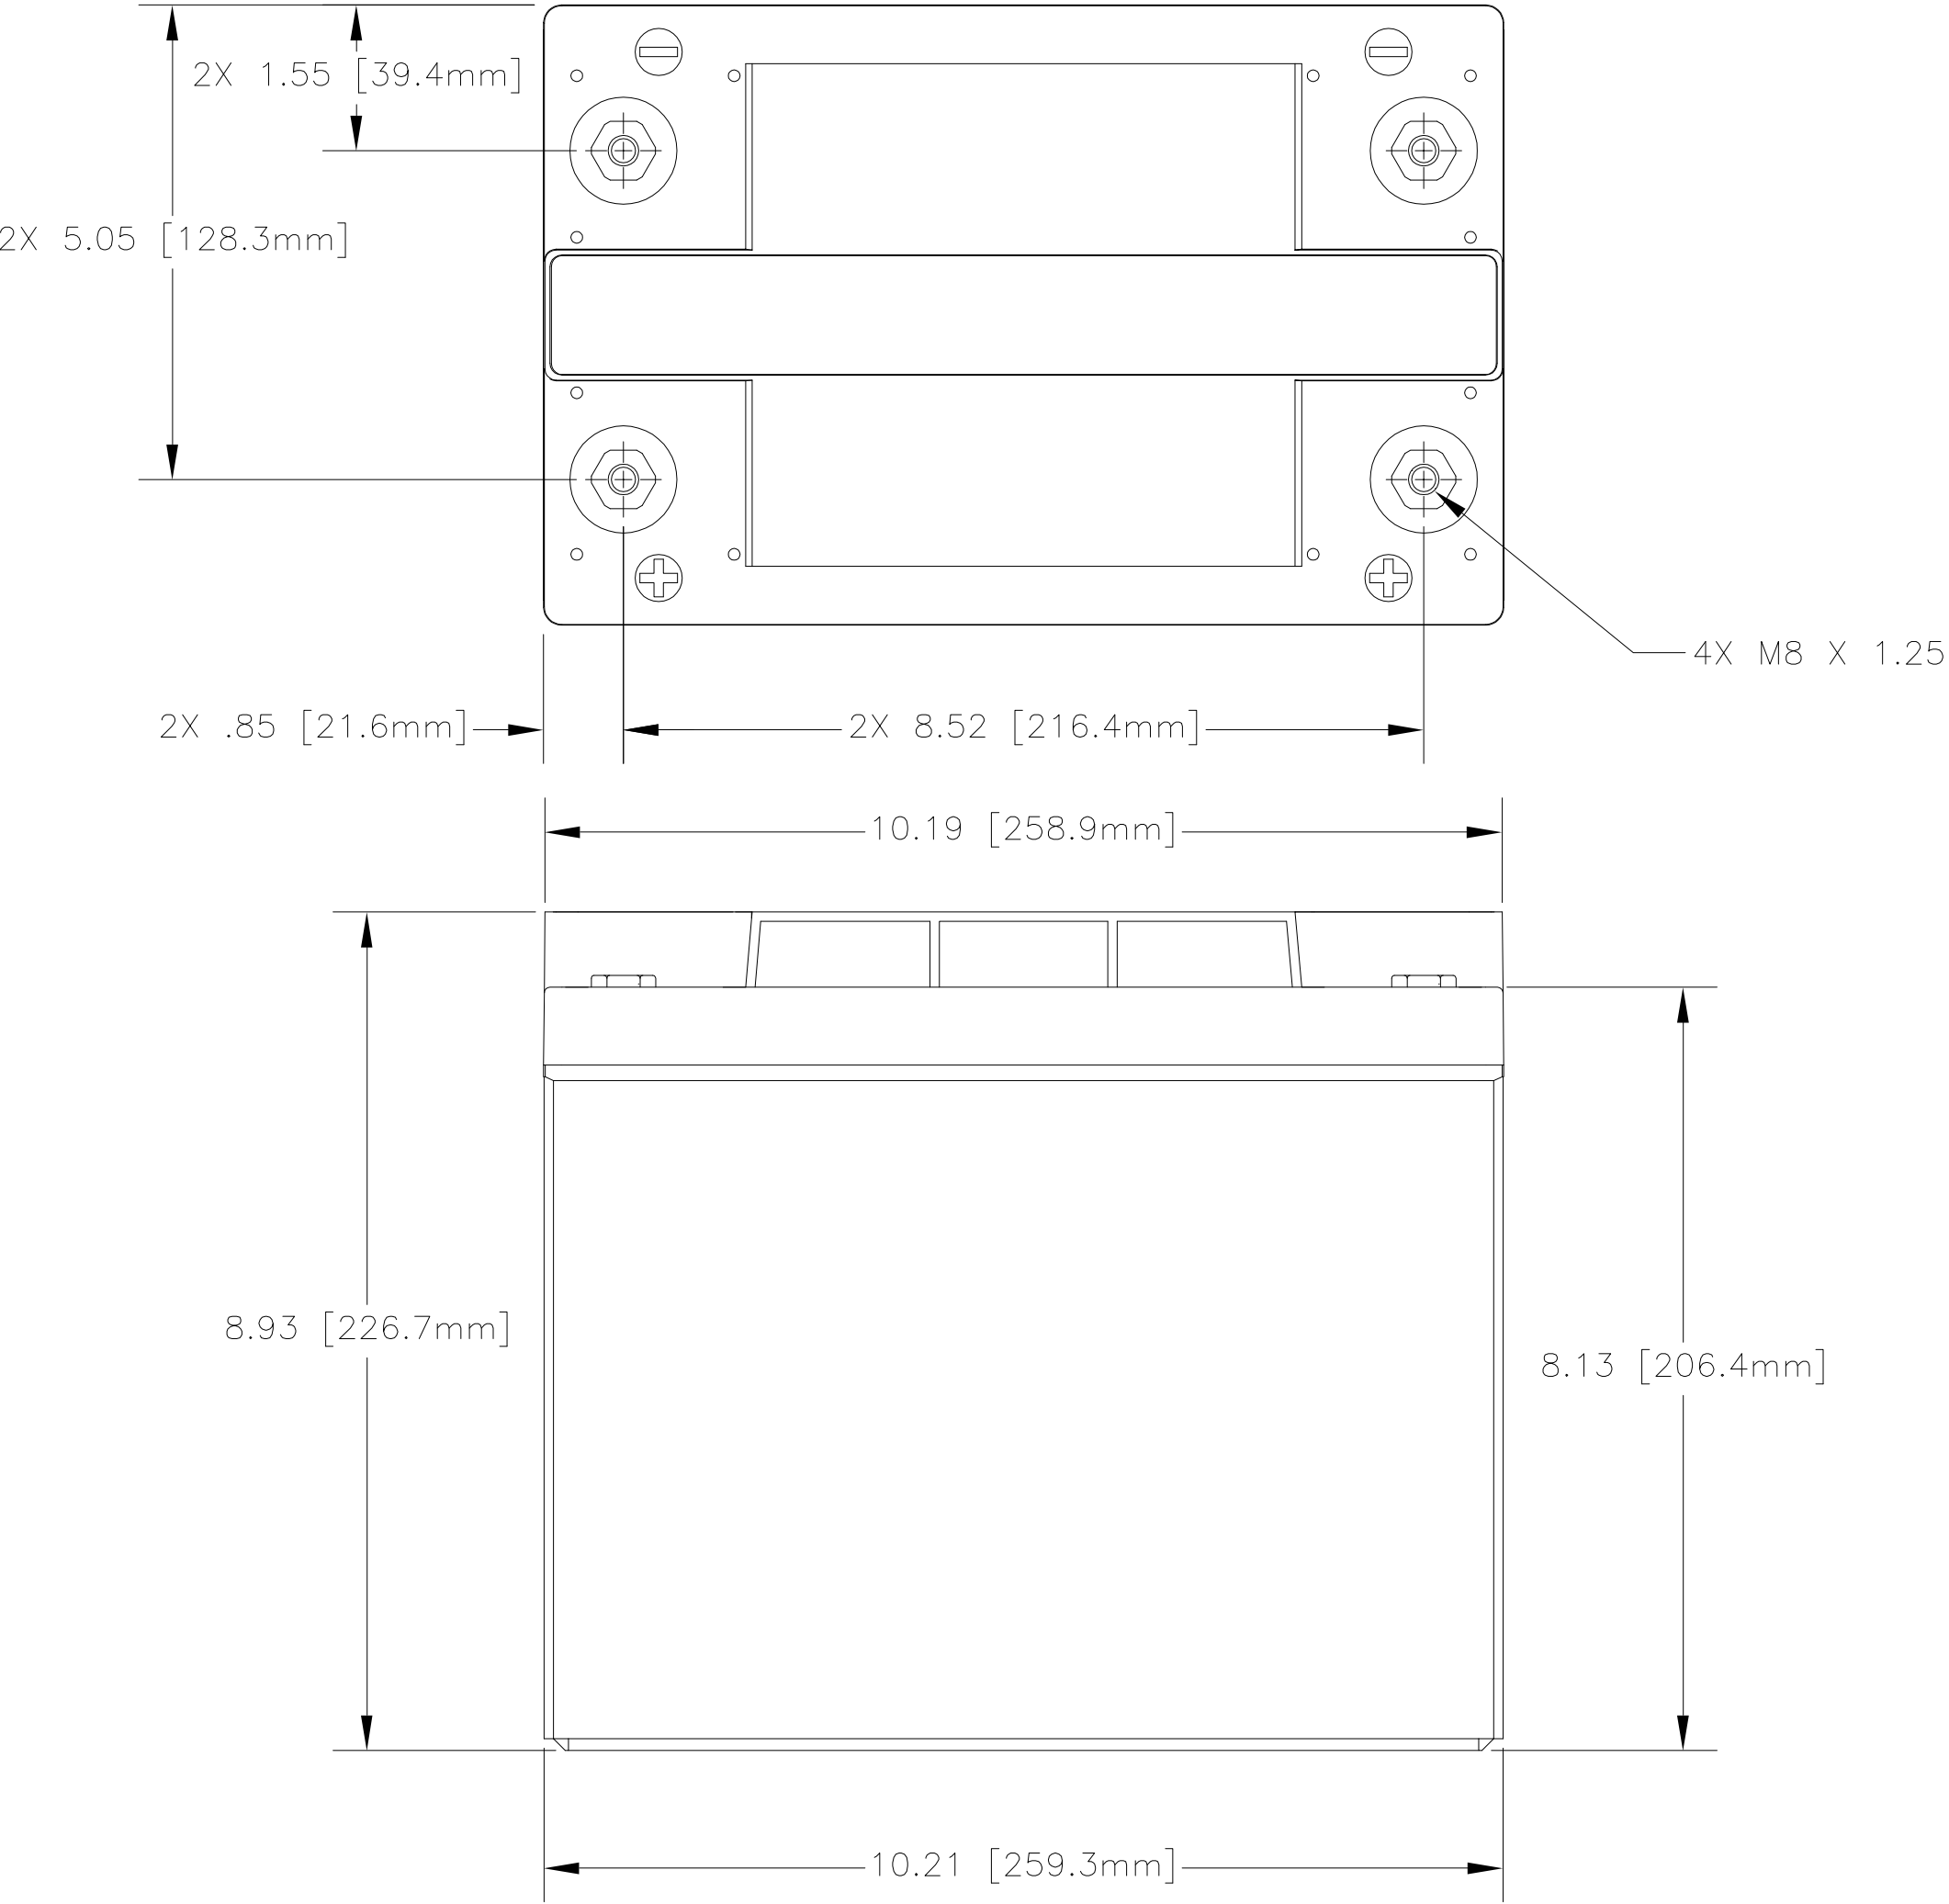

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REMOVED SIDE HOLD-DOWNS	6/10/03	JBT

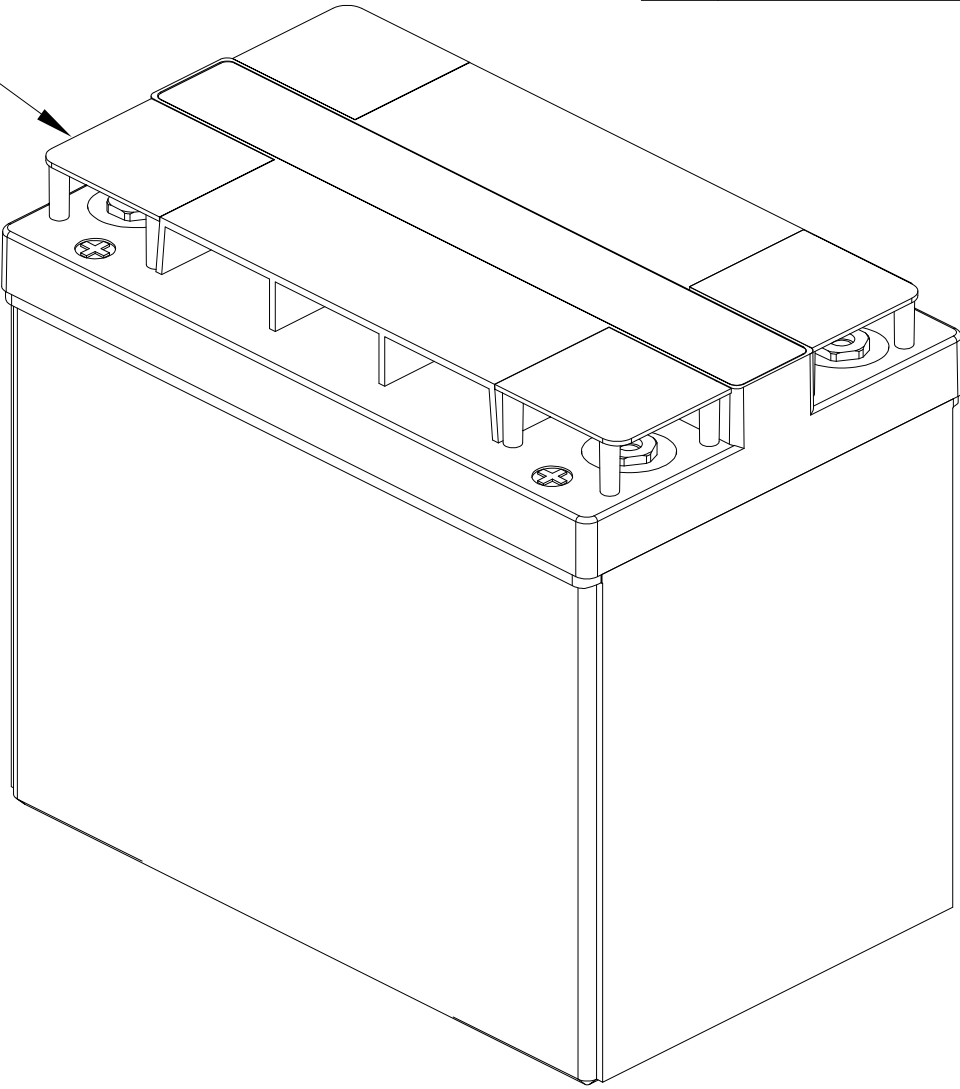

REFERENCE VIEW

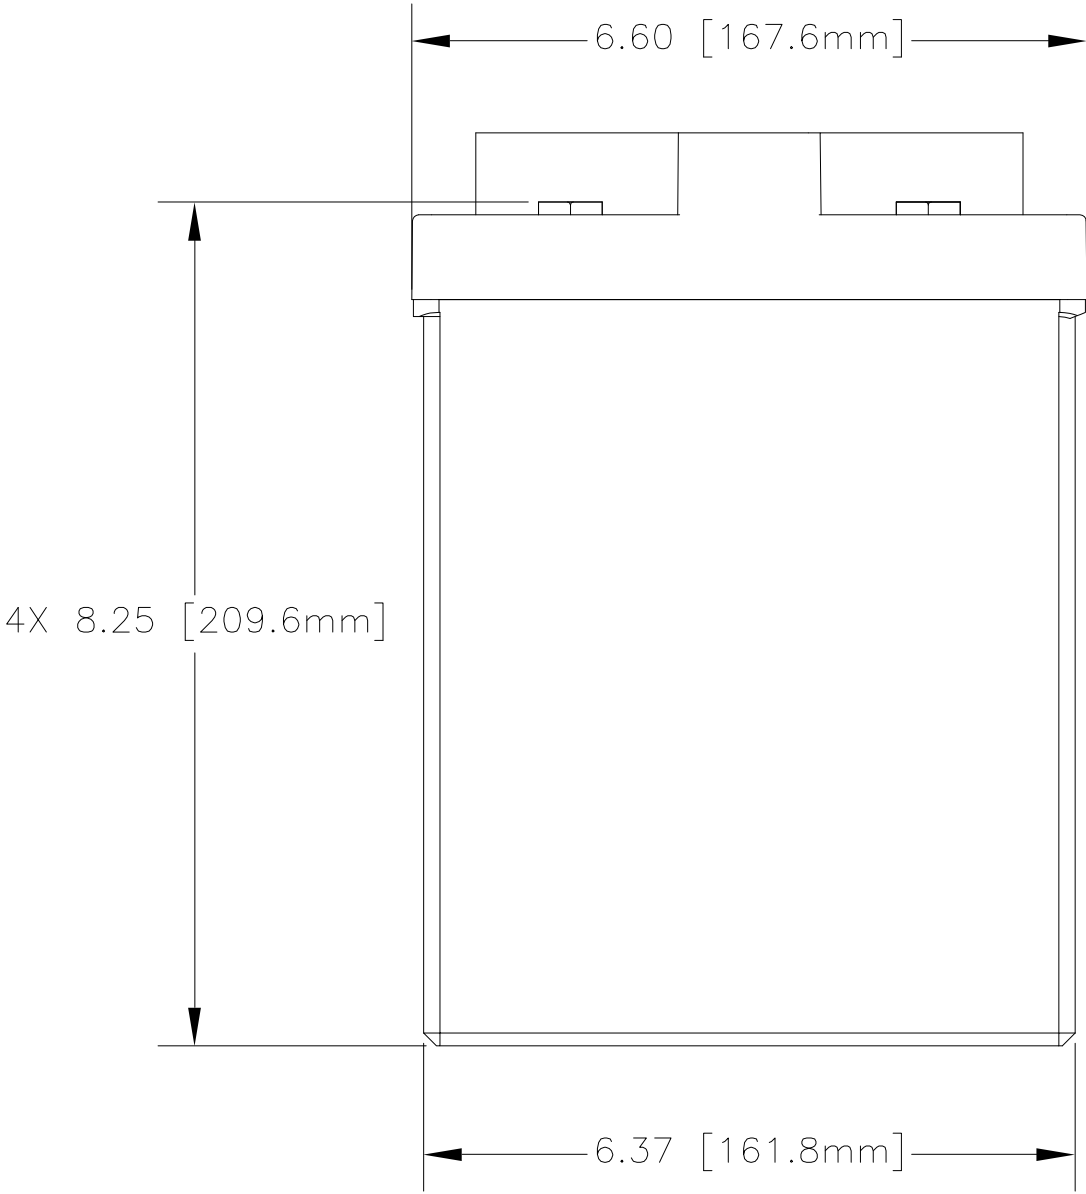

ENVELOPE DRAWING

CAPACITY RATINGS		
PART NUMBER	PVX-4140T	PVX-5040T
NOMINAL WEIGHT	51 LBS [23.2 KG]	57 LBS [25.9 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	414 AH	504 AH

		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION				MATERIAL SPECIFICATION			ITEM NO.		
QTY REQD		PARTS LIST												
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .030					CONTRACT NO. NA			CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790						
					APPROVALS		DATE	TITLE BATTERY, SLA, 2 VOLT, PVX-5040T SERIES						
					DRAWN ELH		8/13/01							
					TREATMENT NONE		CHECKED HRF	8/21/01	SIZE	CAGE CODE		DWG NO.		REV
					FINISH NONE		APPROVED JBT	8/23/01	C	63017		PVX-5040T		A
SIMILAR TO NA		ACT WT NA	CALC WT NA	ISSUED AT	6/13/03	SCALE	NONE			SHEET 1 OF 1				