
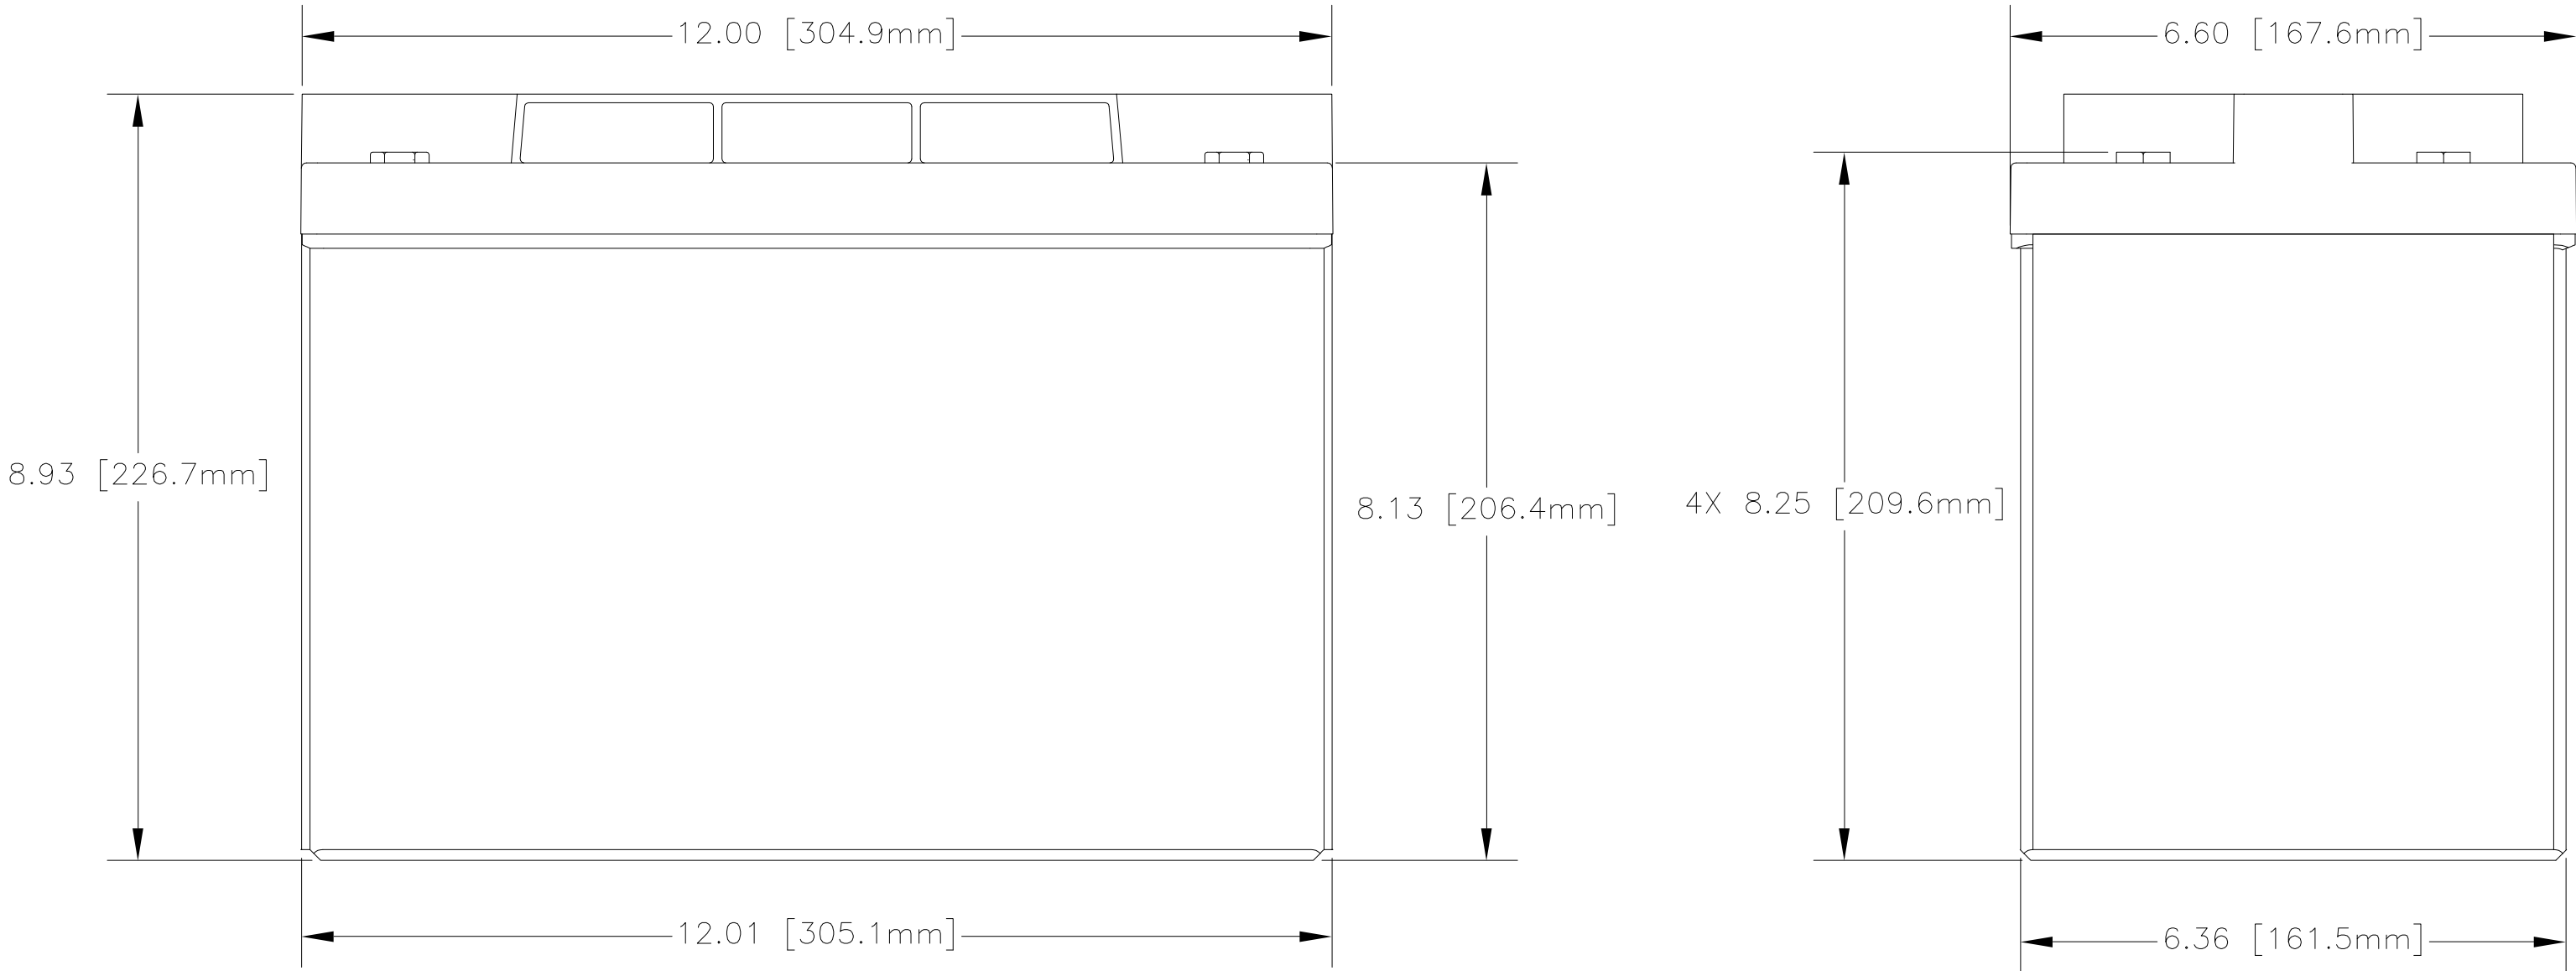
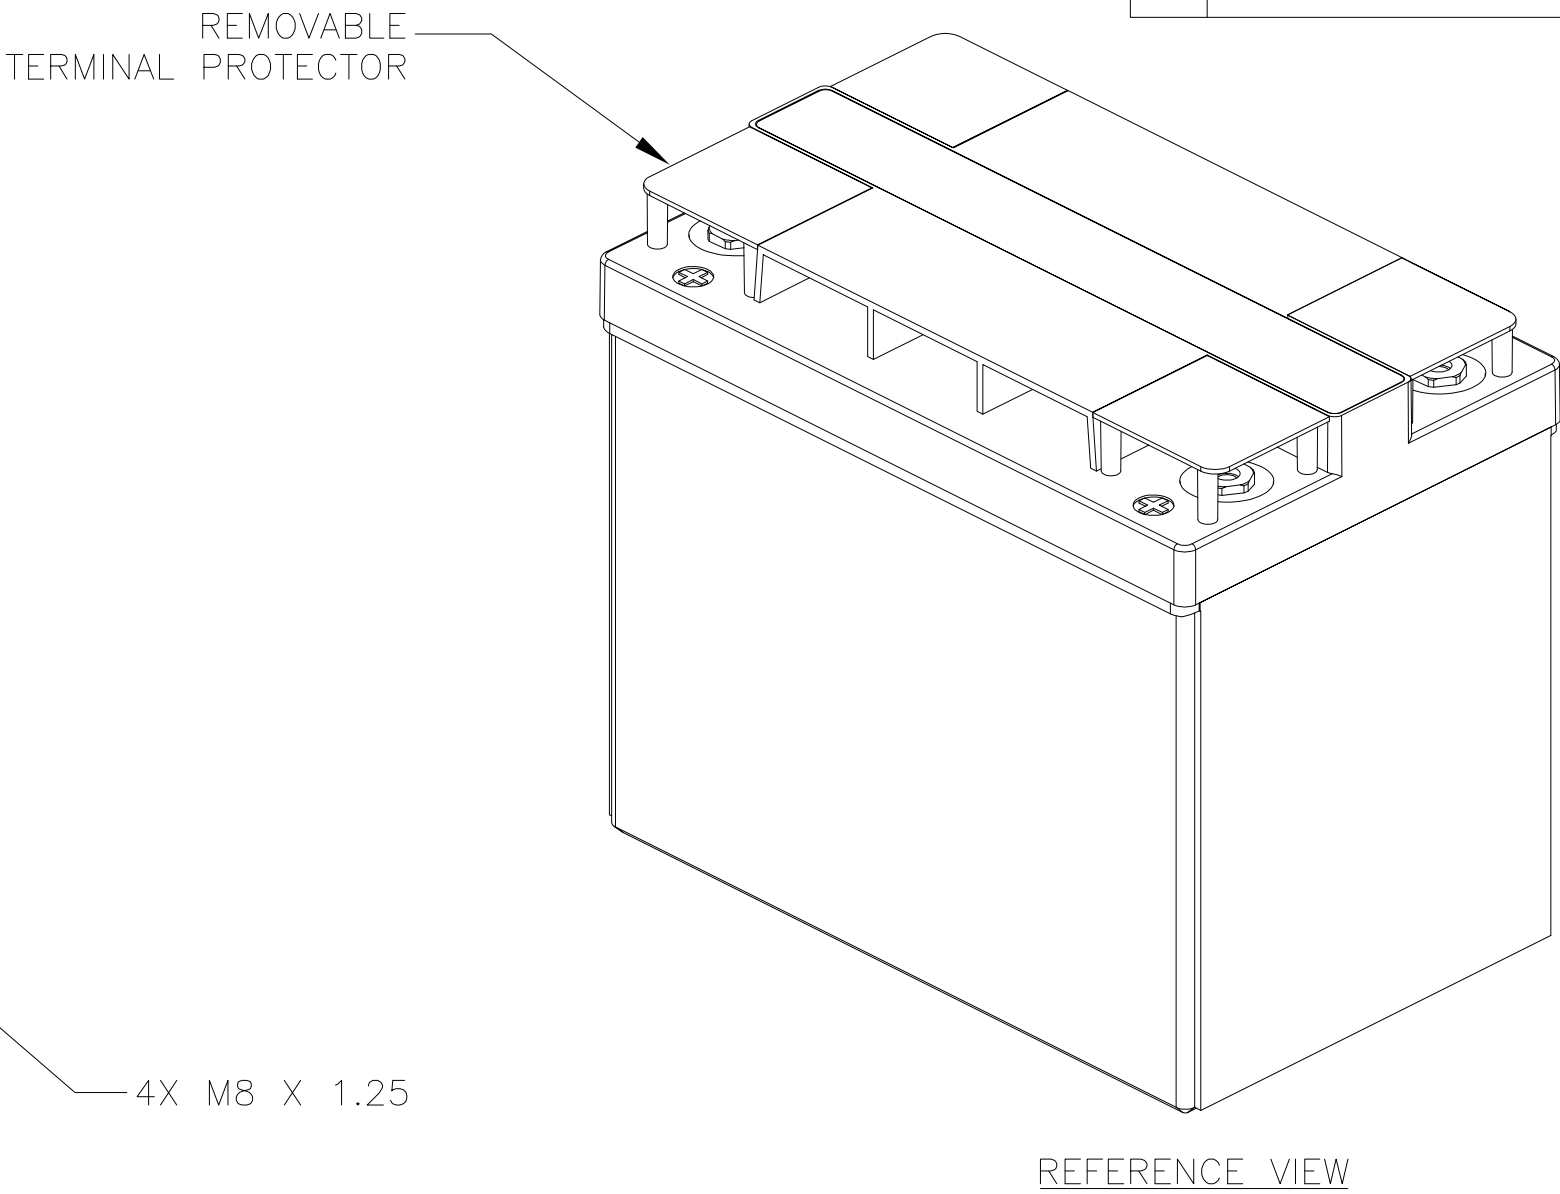


ENGINEERING COPY 13JUN03

- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. SEE DRAWING NO. CB-00287 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
 - 2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
 - 3. ALL DIMENSIONS ARE IN INCHES [MM].
 - 4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

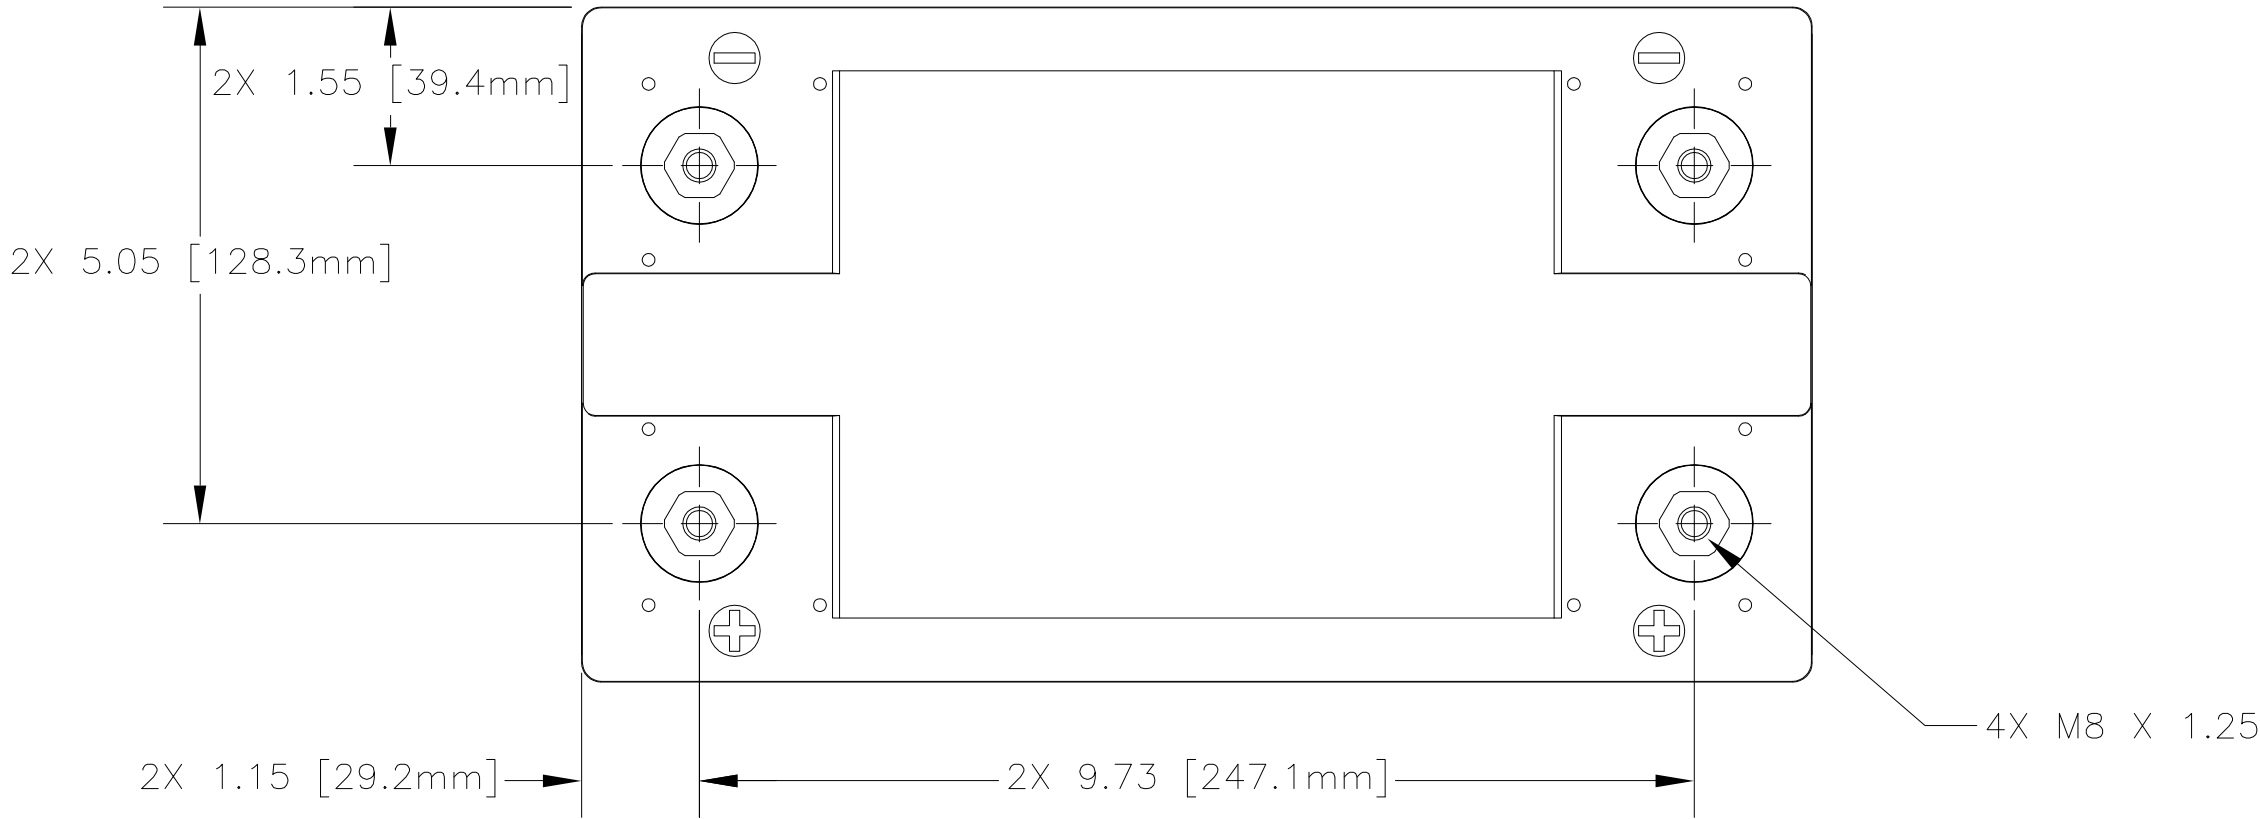

CAPACITY RATINGS	
PART NUMBER	PVX-6240T
NOMINAL WEIGHT	66 LBS [30 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	624 AH

ENVELOPE DRAWING

		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION			MATERIAL SPECIFICATION		ITEM NO.	
QTY REQD			PARTS LIST								
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .030				CONTRACT NO. NA		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790					
				APPROVALS		DATE	TITLE BATTERY, SLA, 2 VOLT, PVX-6240T				
				DRAWN	ELH	8/13/01					
				TREATMENT		NONE	CHECKED	HRF	8/21/01	SIZE C	CAGE CODE 63017
FINISH		NONE	APPROVED	JBT	8/23/01						
SIMILAR TO NA		ACT WT NA	CALC WT NA	ISSUED	AT	6/13/03	SCALE	NONE	SHEET 1 OF 1		